

VS316K/24 white



Specifications

ETI Code	002471225
Description	VS316K/24 white
Class name	Power relay
Function	Monitoring and Control relays
Rated current (A)	16
AC rated control supply voltage Uc (V)	24...24
Number of CO contacts	3
DC rated control supply voltage Uc (V)	24
Voltage type	AC/DC
Supply voltage (V)	24
Number of contacts	3
Type of control	Alarm and control
Maximum load capacity at AC1 (VA)	4000

[Online product page](#)

Other documentation




- Technical data catalogue
- 3D Model
- Instruction manual
- CE declaration
- Eplan file

ETIM international clasification


Classification	EC001437
Class name	Switching relay
Rated current	16
Voltage type	AC/DC
Type of electric connection	Clip connection
Rated control supply voltage AC 50 Hz	24...24V
Rated control supply voltage DC	24V
Voltage type for actuating	AC/DC
Number of contacts as change-over contact	3
Type of switch contact	Other
Degree of protection (IP)	IP20
Width	18mm
Height	90mm
Depth	65mm

Symbol/Connection


VS116K

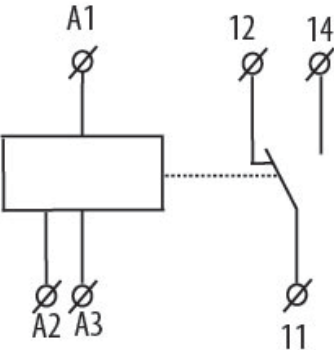

VS316/24

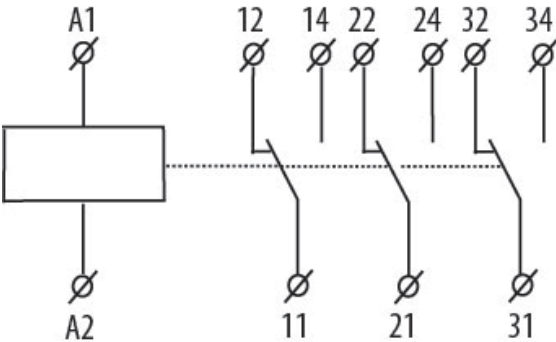


VS316/230

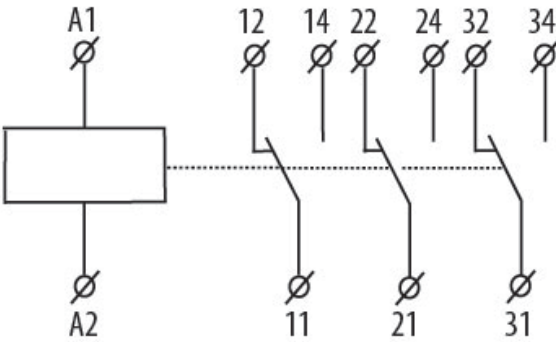

Description

VS116K

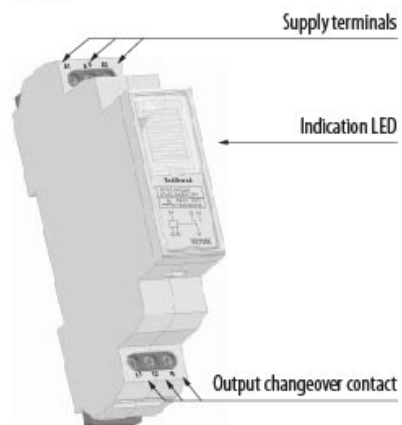

terminal A3 only for VS116K

VS316/24, VS316/230

