



FUSIBILI 5x20HT

Caratteristiche generali:

- Fusibili miniatura;
- Dimensioni: 5 x 20 mm;
- Caratteristica d'intervento: ritardato (T);
- Conformi alle norme: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Corpo in steatite;
- Elemento riempitivo: sabbia di quarzo (a partire dalla corrente nominale di 250mA);
- Contatti in rame argentato;
- Corrente nominale: da 100mA a 10A;
- Tensione nominale: 250V;
- Potere di interruzione: 1,5kA;
- Temperatura operativa: -40°C / +90°C;
- Temp. di stoccaggio: -40°C / +85°C;
- Confezione minima: 10 pezzi;

Foto del prodotto / Product image




5x20HT FUSES

General characteristics:

- Miniature fuses;
- Dimensions: 5 x 20 mm;
- Fusion characteristic: time-delay (T);
- Conform to standards: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Steatite body;
- Filler element: quartz sand (starting from 250mA rated current);
- Silver plated contacts;
- Rated current: from 100mA to 10A;
- Rated voltage: 250V;
- Breaking capacity: 1,5kA;
- Working temperature: -40°C / +90°C;
- Storage temperature: -40°C / +85°C;
- Minimum packaging: 10 pieces;

Disegno / Drawing

(dimensioni in mm) / (dimensions in mm)

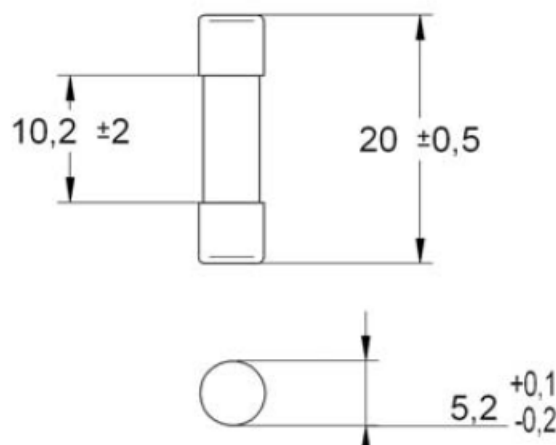

Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 7 maggio 2021

Last updated: 7th May 2021



Codici per l'ordinazione:

Ordering codes:

Fus ritardati HT <i>Time-delay fuses HT</i>	In	Vn	Caduta di tensione <i>Voltage drop</i>	I²t totale (A²s) <i>Total I²t (A²s)</i>	conf. pack.
0120100	100 mA	250 V	4500 mV	0,019	10
0120125	125 mA	250 V	3600 mV	0,025	10
0120160	160 mA	250 V	2900 mV	0,037	10
0120200 (1)	200 mA	250 V	2100 mV	0,048	10
0120250 (1)	250 mA	250 V	1500 mV	0,057	10
0120315 (1)	315 mA	250 V	1100 mV	0,096	10
0120400 (1)	400 mA	250 V	1000 mV	0,161	10
0120500 (1)	500 mA	250 V	850 mV	0,257	10
0120630 (1)	630 mA	250 V	650 mV	0,451	10
0120800 (1)	800 mA	250 V	500 mV	0,553	10
0121001 (1)	1 A	250 V	350 mV	1,014	10
0121025 (1)	1,25 A	250 V	300 mV	2,115	10
0121160 (1)	1,6 A	250 V	200 mV	4,238	10
0121200 (1)	2 A	250 V	190 mV	7,120	10
0121250 (1)	2,5 A	250 V	180 mV	7,781	10
0121315 (1)	3,15 A	250 V	140 mV	15,46	10
0121400 (1)	4 A	250 V	100 mV	37,60	10
0121500 (1)	5 A	250 V	100 mV	60,95	10
0121630 (1)	6,3 A	250 V	100 mV	101,3	10
0121800 (1)	8 A	250 V	100 mV	188,7	10
0121900 (1)	10 A	250 V	100 mV	323,4	10

1) Con omologazione UR

1) With UR approval



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

