



FUSIBILI 6x32F TIPO UL / CSA

Caratteristiche generali:

- Fusibili miniatura;
- Dimensioni: 6,3 x 32 mm;
- Caratteristica d'intervento: rapido (F);
- Conformi alle norme: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2, UL 248-14, CSA C22.2;
- Corpo in vetro;
- Contatti in rame argentato;
- Corrente nominale: da 32mA a 10A;
- Tensione nominale: 250V;
- Temperatura di lavoro: -30°C / + 80°C;
- Confezione minima: 100 pezzi;
- Produttore: Hollyland;
- Codice produttore: 61NM;

Foto del prodotto / Product image




UL / CSA TYPE 6x32F FUSES

General characteristics:

- Miniature fuses;
- Dimensions: 6,3 x 32 mm;
- Time-current characteristic: fast (F);
- Conform to standards: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2, UL 248-14, CSA C22.2;
- Glass body;
- Silver plated contacts;
- Rated current: from 32mA to 10A;
- Rated voltage: 250V;
- Operating temperature: -30°C / +80°C;
- Minimum packaging: 100 pieces;
- Manufacturer: Hollyland;
- Manufacturer code: 61NM;

Disegno / Drawing

(dimensioni in mm) / (dimensions in mm)

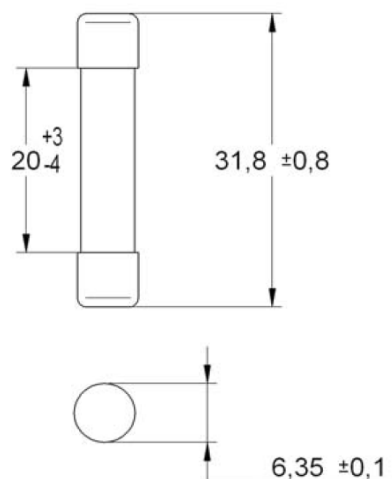

Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 1 Luglio 2014

Last updated: 1st July 2014



Codici per l'ordinazione:

Ordering codes:


Codice fusibile <i>Fuse code</i>	In	Vn	Potere di interruzione a 125V AC (A) <i>Breaking capacity at 125V AC (A)</i>	Potere di interruzione a 250V AC (A) <i>Breaking capacity at 250V AC (A)</i>	Conf Pack
0360032	32mA	250V	10.000	35	100
0360050	50mA	250V	10.000	35	100
0360063	63mA	250V	10.000	35	100
0360080	80mA	250V	10.000	35	100
0360100	100mA	250V	10.000	35	100
0360125	125mA	250V	10.000	35	100
0360160	160mA	250V	10.000	35	100
0360200	200mA	250V	10.000	35	100
0360250	250mA	250V	10.000	35	100
0360315	315mA	250V	10.000	35	100
0360400	400mA	250V	10.000	35	100
0360500	500mA	250V	10.000	35	100
0360630	630mA	250V	10.000	35	100
0360800	800mA	250V	10.000	35	100
0361001	1A	250V	10.000	35	100
0361251	1,25A	250V	10.000	100	100
0361601	1,6A	250V	10.000	100	100
0362002	2A	250V	10.000	100	100
0362502	2,5A	250V	10.000	100	100
0363153	3,15A	250V	10.000	100	100
0364004	4A	250V	10.000	200	100
0365005	5A	250V	10.000	200	100
0366306	6,3A	250V	10.000	200	100
0366307	8A	250V	10.000	200	100
0366308	10A	250V	10.000	200	100

- Tutti i codici sopra indicati sono omologati UL e CSA;
- Omologazione UL: E156471;
- Omologazione CSA: LR 101178-1;

All the above indicated codes have UL and CSA approvals;

UL approval: E156471;

CSA approval: LR 101178-1;



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

