



FUSIBILI EXTRARAPIDI BS88

Caratteristiche generali:

- Tipo prodotto: fusibili a lama BS88;
- Serie omologata UR;
- Tensione nominale: 240V AC / 150V DC;
- Quattro diverse dimensioni;
- Caratteristica d'intervento: extrarapida;
- Conformi alle norme: BS88:4, IEC 60269-4;
- Corpo in steatite;
- Contatti in rame argentato;
- Corrente nominale: da 6A a 800A;
- Potere di interruzione: 200kA;
- Confezione minima: 1 pezzi;
- Produttore: Bussmann;

HIGH SPEED BS88 FUSES

General characteristics:

- *Product type: blade type BS88 fuses;*
- *UR approved series;*
- *Rated voltage: 240V AC / 150V DC;*
- *Four different dimensions;*
- *Time-current characteristic: high speed;*
- *Conform to standards: BS88:4, IEC 60269-4;*
- *Steatite body;*
- *Silver plated copper contacts;*
- *Rated current: from 6A to 800A;*
- *Breaking capacity: 200kA;*
- *Minimum packaging: 1 piece;*
- *Manufacturer: Bussmann;*

Foto dei prodotti / Products images



Pagine totali del documento: 8

Document total pages: 8

Ultimo aggiornamento: 20 novembre 2015

Last updated: 20th November 2015



Codici e caratteristiche principali:

Codes and basic characteristics:


Codice Code	Tipo Type	Interasse (mm) Distance between fixing holes (mm)	Corrente nominale (A) Rated current (A)	I²t prearco (A²s) Prearcing I²t (A²s)	I²t totale (A²s) Totale I²t (A²s)	Potenza dissipata (W) Power dissipat. (W)	Conf Pack
1734005	LCT-6	38	6	2	9	1	1-20
1734010	LCT-10	38	10	3.8	22	2,5	1-20
1734012	LCT-12	38	12	7	32	2,5	1-20
1734015	LCT-16	38	16	20	100	2,5	1-20
1734020	LCT-20	38	20	25	160	4	1-20
1700107	LET-7	41,8	7	8	120	2,3	1-10
1700110	LET-10	41,8	10	9	140	2,5	1-10
1700112	LET-12	41,8	12	10	160	3	1-10
1700116	LET-16	41,8	16	12	200	3,5	1-10
1734025B	LET-25	41,8	25	18	250	4	1-10
1734032B	LET-32	41,8	32	32	450	5	1-10
1734035B	LET-35	41,8	35	50	600	5	1-10
1734050B	LET-50	41,8	50	100	1.400	7	1-10
1734063B	LET-63	41,8	63	180	2.200	9	1-10
1734080B	LET-80	41,8	80	300	3.800	10	1-10
1734100B	LET-100	41,8	100	600	7.500	10	1-10
1734125B	LET-125	41,8	125	600	7.500	16	1-10
1734159B	LET-160	41,8	160	1.100	16.000	20	1-10
1734180B	LET-180	41,8	180	1.600	29.000	21	1-10
1734160B	LMT-160	59	160	1.100	16.000	17	1-5
1734200B	LMT-200	59	200	1.500	20.000	28	1-5
1734250B	LMT-250	59	250	3.200	40.000	28	1-5
1734315B	LMT-315	59	315	6.000	75.000	35	1-5
1734350B	LMT-355	59	355	8.000	100.000	35	1-5
1734400B	LMT-400	59	400	14.000	160.000	40	1-5
1734450B	LMT-450	59	450	18.000	220.000	42	1-5
1734401B	LMMT-400	59	400	6.000	80.000	60	1-2
1734500B	LMMT-500	59	500	14.000	170.000	64	1-2
1734630B	LMMT-630	59	630	24.000	300.000	75	1-2
1734710B	LMMT-710	59	710	32.000	460.000	77	1-2
1734800B	LMMT-800	59	800	52.000	600.000	82	1-2




Disegno (dimensioni in mm):

Drawing (dimensions in mm) :


Fusibili LCT - Fuses LCT

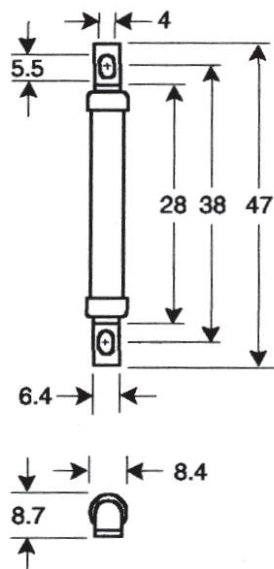


Fusibili LET - Fuses LET

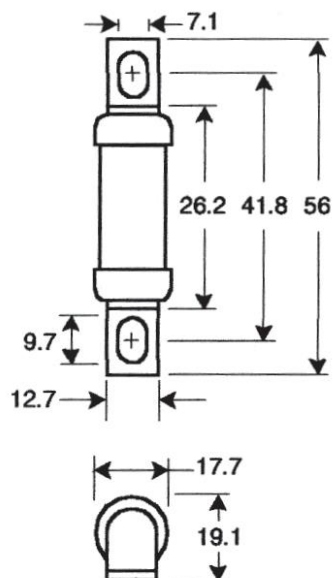

Fusibili LMT - Fuses LMT

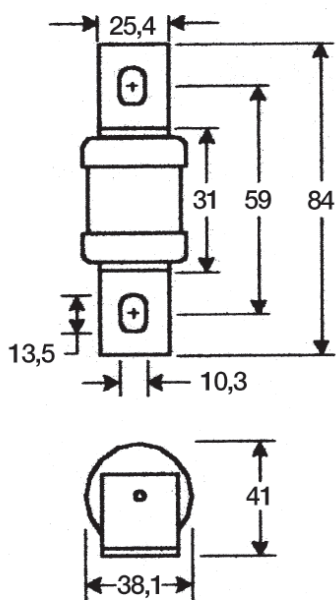


Fusibili LMMT - Fuses LMMT

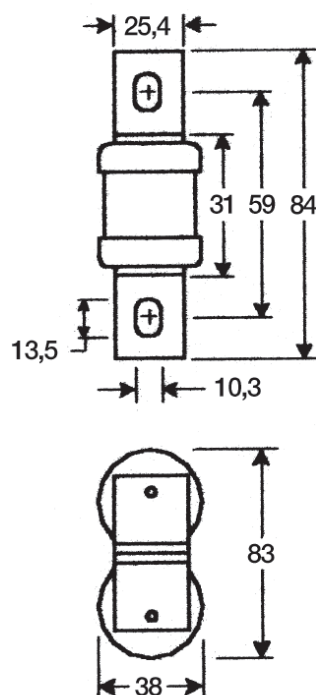




**Curve caratteristiche tempo / corrente
Modelli LCT**


**Time / current characteristic curves
LCT types**

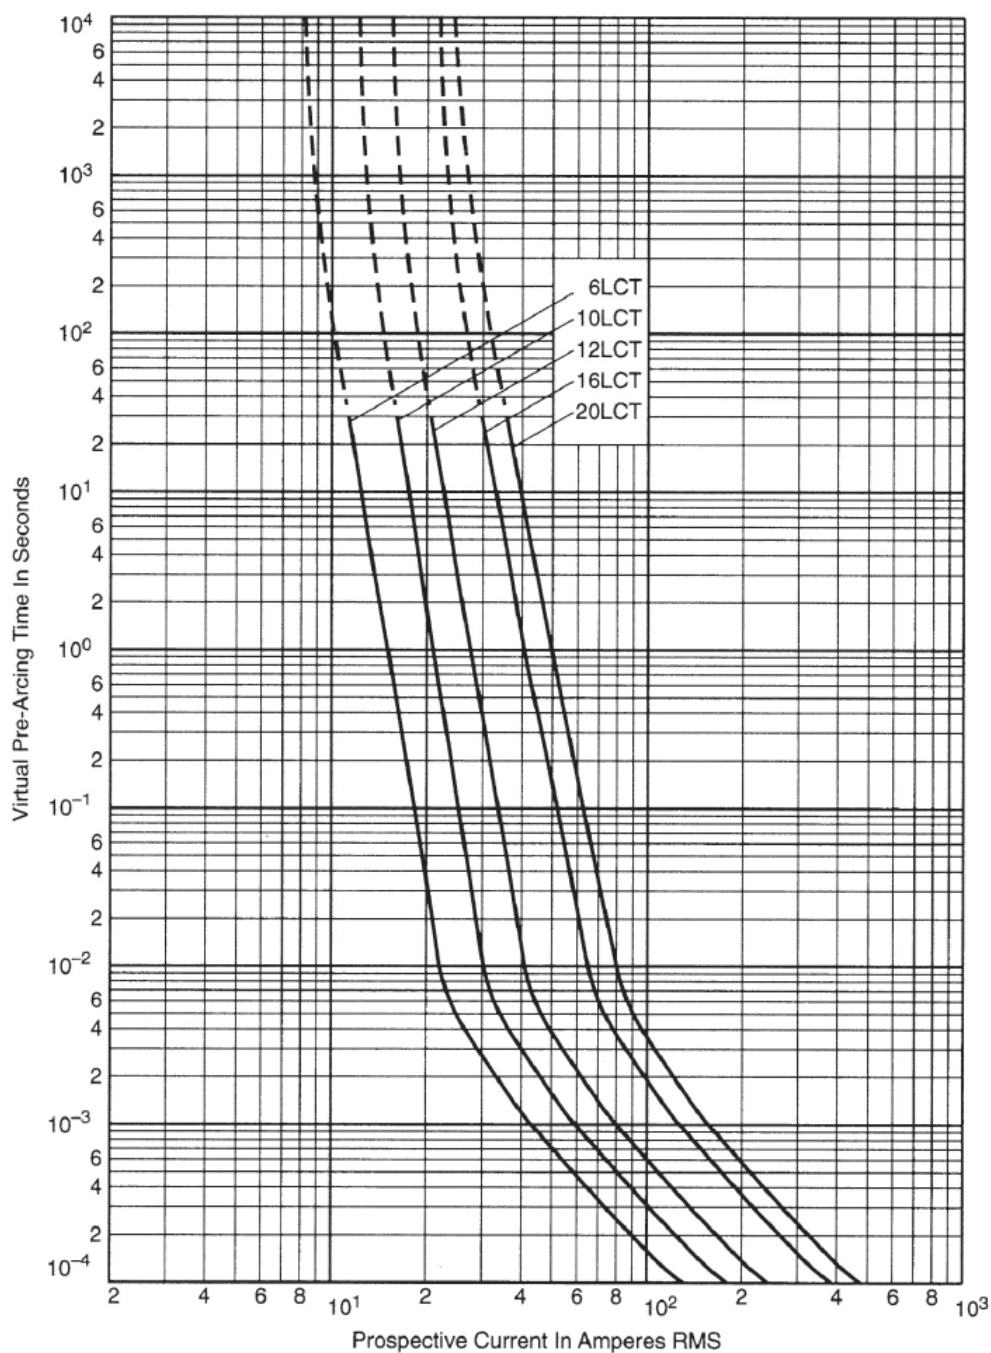




**Curve caratteristiche tempo / corrente
Modelli LET**


***Time / current characteristic curves
LET types***

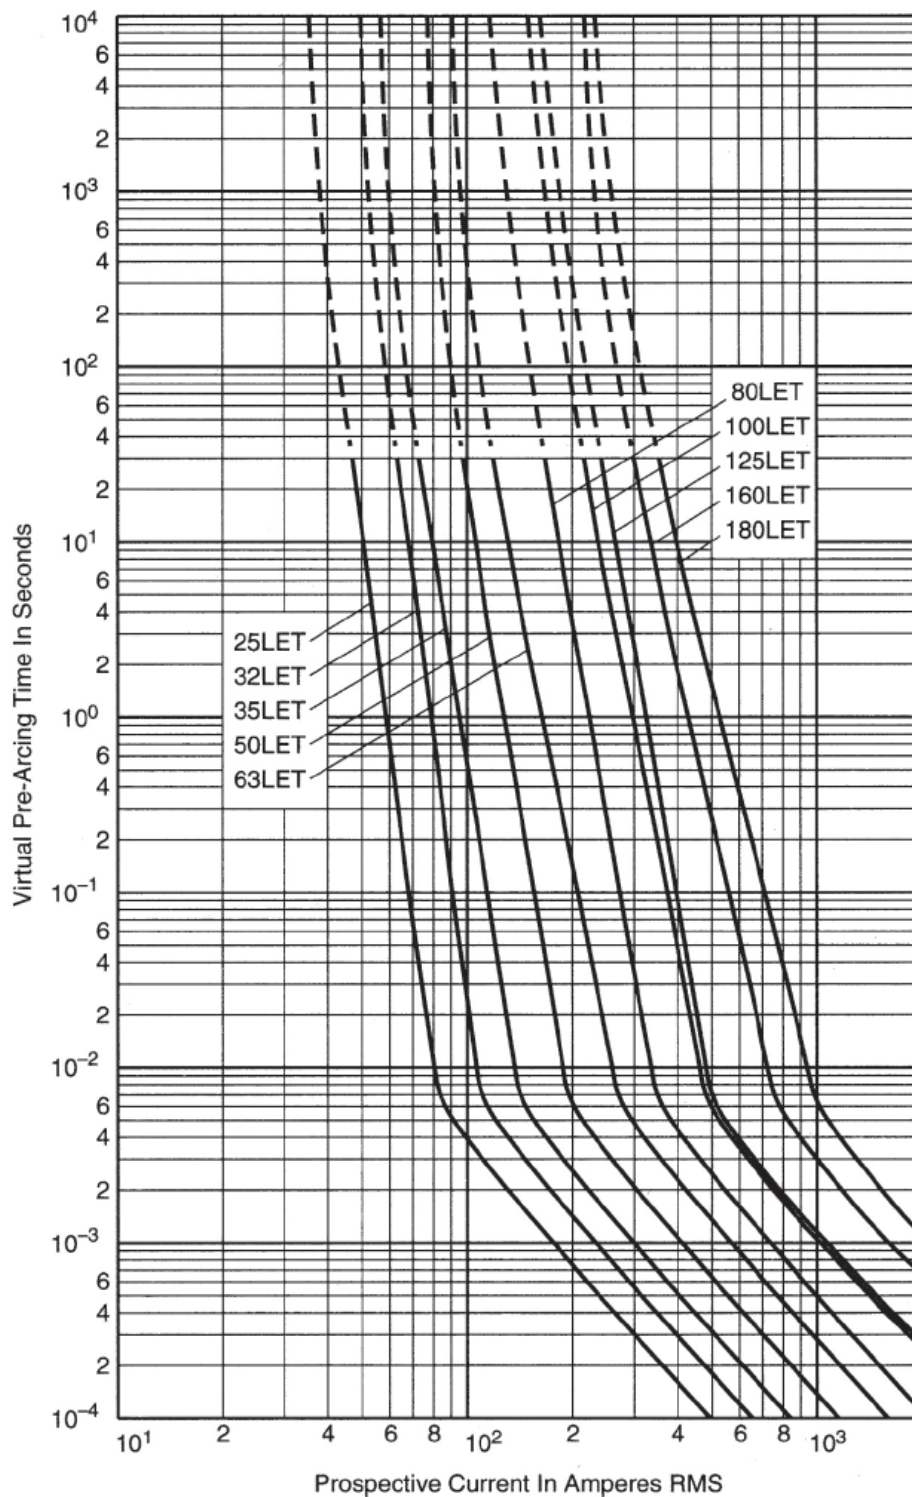


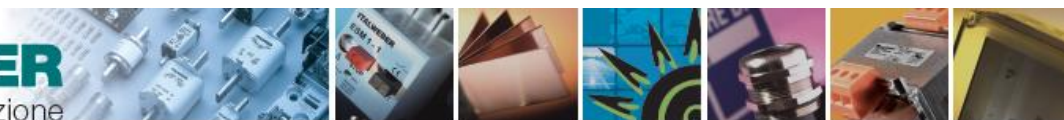

**Curve caratteristiche tempo / corrente
Modelli LMT**


***Time / current characteristic curves
LMT types***

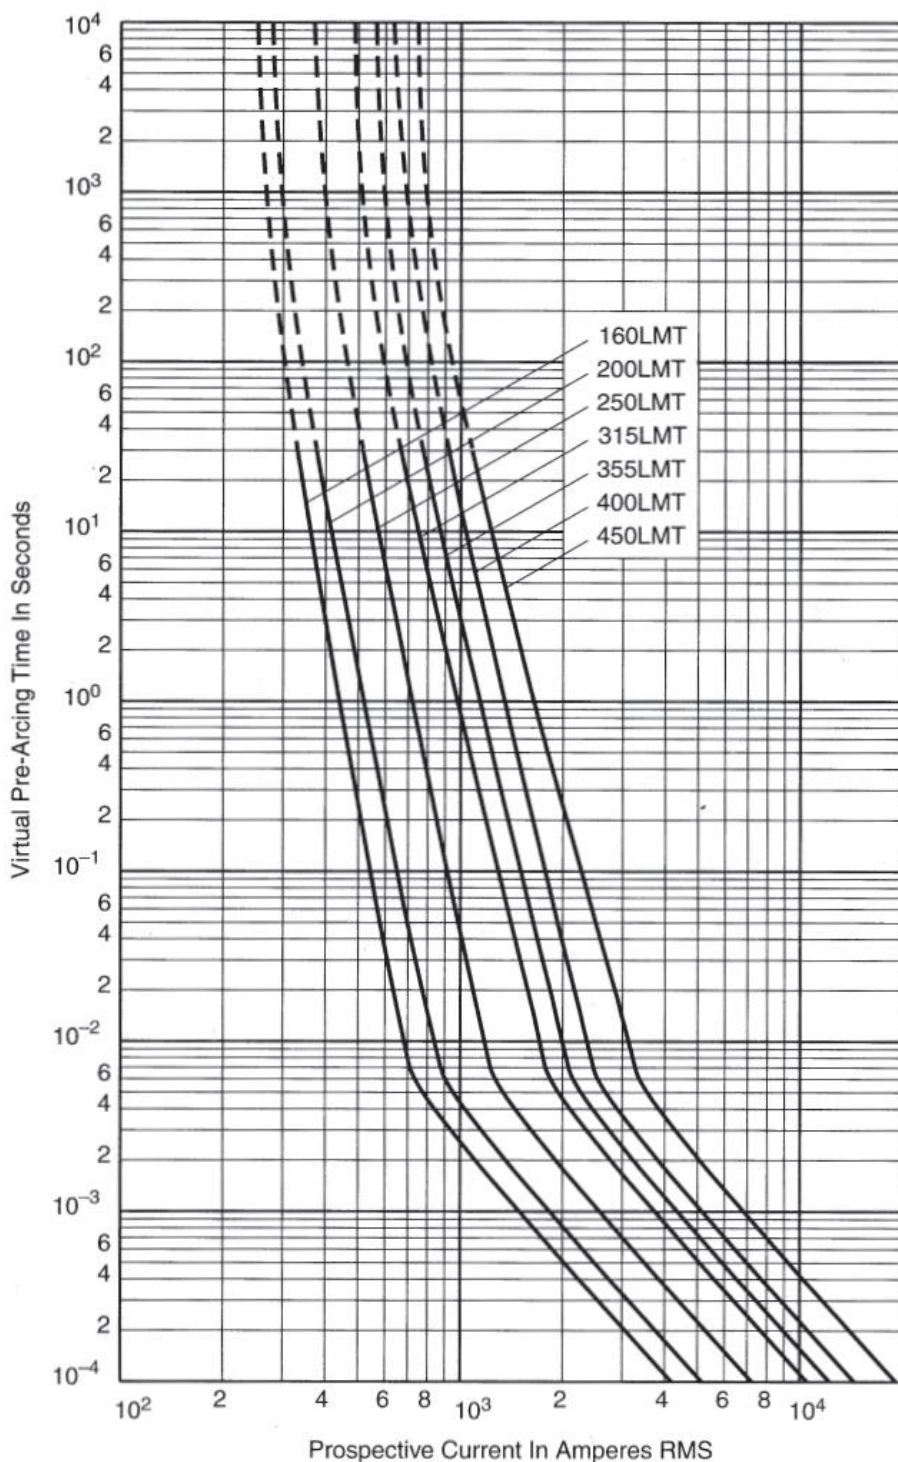

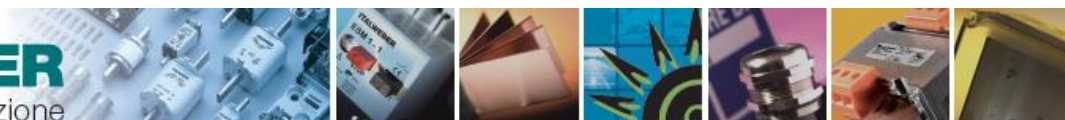

**Curve caratteristiche tempo / corrente
Modelli LMMT**

***Time / current characteristic curves
LMM T types***

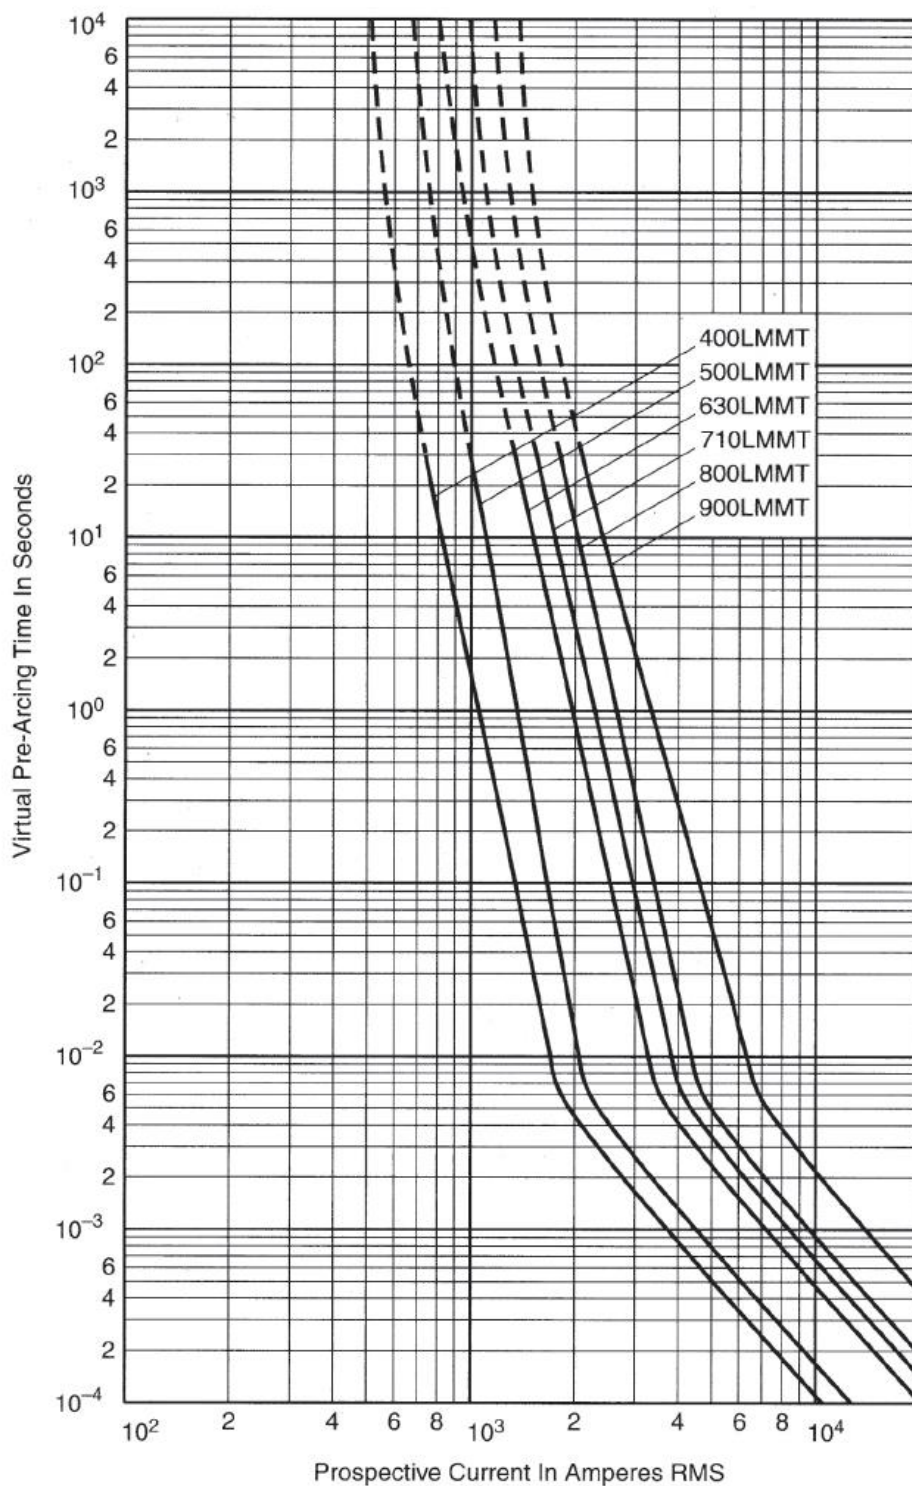



Caratteristiche di limitazione

Cut off characteristic

