

FUSIBILI CH 14x51 gPV

Fissaggio a bullone

Caratteristiche generali:

- Tipo prodotto: fusibili cilindrici per la protezione delle stringhe negli impianti fotovoltaici;
- Fissaggio a bullone;
- Caratteristica d'intervento: gPV;
- Conformi alle norme: IEC 60269-6;
- Corpo in steatite;
- Contatti in argento;
- Corrente nominale: da 16A a 36A;
- Tensione nominale: 1000V DC;
- Potere di interruzione: 30kA;
- Confezione minima: 10 pezzi;

CH 14x51 gPV FUSES


Fixing by screw

General characteristics:

- *Product type: cylindrical fuses for panels string protection of photovoltaic plants;*
- *Screw fixing;*
- *Time-current characteristic: gPV;*
- *Conform to standards: IEC 60269-6;*
- *Steatite body;*
- *Silver contacts;*
- *Rated current: from 16 to 36A;*
- *Rated voltage: 1000V DC;*
- *Breaking capacity: 30kA;*
- *Minimum packaging: 10 pieces;*

Disegno / Drawing

(dimensioni in mm) / (dimensions in mm)

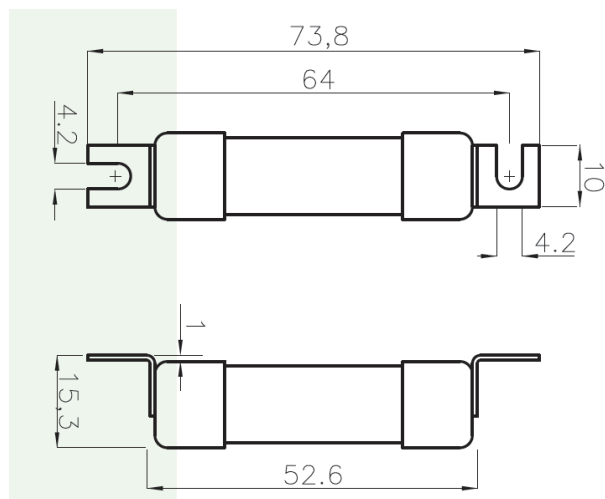


Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 27 marzo 2017


Last update: 27st March 2017



Caratteristiche principali:

Basic characteristics:

Codice Code	In (A)	Potenza dissipata alla In (W) <i>Power dissipation at In (W)</i>	Potenza dissipata a 0,7 x In (W) <i>Power dissipation at 0,7 x In (W)</i>	Valore I ² t prearco (A ² s) <i>Pre-arcing Joule integral (A²s)</i>	Valore I ² t totale (A ² s) <i>Total Joule integral (A²s)</i>
1465066SU	16	3,1	1,4	55	155
1465070SU	20	3,2	1,5	130	330
1465075SU	25	4	2	180	360
1465082SU	32	5,1	2,1	390	1150
1465086SU	36	5,6	2,3	450	1190



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

