

FUSIBILI CH/SP 10 x 85 gPV

Caratteristiche generali:

- Tipo prodotto: fusibili cilindrici per la protezione delle stringhe negli impianti fotovoltaici;
- Dimensioni: 10,3x85 mm (fino a 20A), 10/14x85 (da 25 a 40A), 10/14x85 doppi (da 50 a 63A);
- Caratteristica d'intervento: gPV;
- Conformi alle norme: IEC 60269-1, IEC 60269-6;
- Corpo in steatite;
- Contatti in rame argentato;
- Corrente nominale: da 2A a 63A;
- Tensione nominale: 1500V DC;
- Potere di interruzione: 50kA;
- Confezione minima: 10 pezzi;

CH/SP 10 x 85 gPV FUSES

General characteristics:

- *Product type: cylindrical fuses for panels string protection of photovoltaic plants;*
- *Dimensions: 10,3x85 mm (up to 20A), 10/14x85 (from 25 to 40A), 10/14x85 double (from 50 to 63A);*
- *Time-current characteristic: gPV;*
- *Conform to standards: IEC 60269-1, IEC 60269-6;*
- *Steatite body;*
- *Contacts in Silver-plated copper;*
- *Rated current: from 2A to 63A;*
- *Rated voltage: 1500V DC;*
- *Breaking capacity: 50kA;*
- *Minimum packaging: 10 pieces;*

Foto del prodotto / Product image




Pagine totali del documento: 5

Document total pages: 5

Ultimo aggiornamento: 1 ottobre 2024


Last update: 1st October 2024




Codici per l'ordinazione:

Ordering codes:


Codice Code	In (A)	Dimensione Dimension	Potenza dissipata alla In (W) Power dissipation at In (W)	Tensione nominale (V) Rated voltage (V)	Valore I ² t prearco (A ² s) Pre-arcing Joule integral (A ² s)	Valore I ² t totale (A ² s) Total Joule integral (A ² s)
1468502	2	10x85	2,40	1500V DC	1,5	2,1
1468504	4	10x85	2,70	1500V DC	10,2	15,1
1468506	6	10x85	3,00	1500V DC	23,3	50,4
1468508	8	10x85	3,60	1500V DC	46	109
1468510	10	10x85	3,70	1500V DC	63	191
1468512	12	10x85	3,75	1500V DC	24	118
1468515	15	10x85	3,8	1500V DC	34	161
1468516	16	10x85	3,85	1500V DC	35	164
1468520	20	10x85	4,8	1500V DC	39	431
1468525E	25	10/14x85	5,6	1500V DC	72	633
1468530E	30	10/14x85	6,4	1500V DC	144	959
1468532E	32	10/14x85	7,4	1500V DC	159	1.130
1468535E	35	10/14x85	7,5	1500V DC	260	1.500
1468540E	40	10/14x85	7,7	1500V DC	400	2.500
1468550E	50	10/14x85 T	13	1500V DC	450	3.000
1468563E	63	10/14x85 T	13,7	1500V DC	770	4.300




Disegno (dimensioni in mm) / Drawing (dimensions in mm)

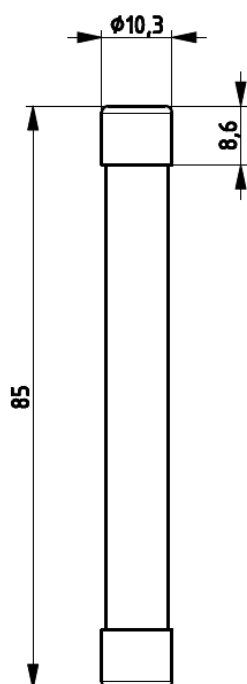


10x85

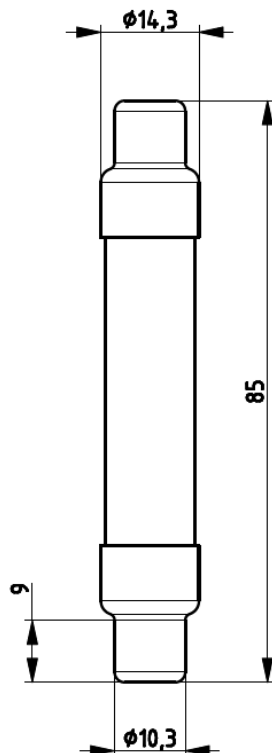

10/14x85

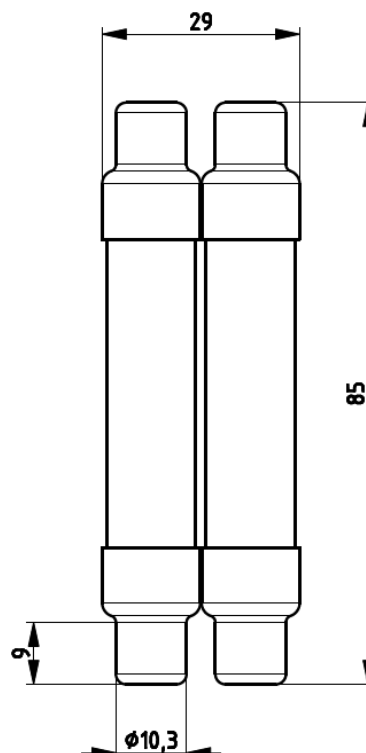


10/14x85 T



Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

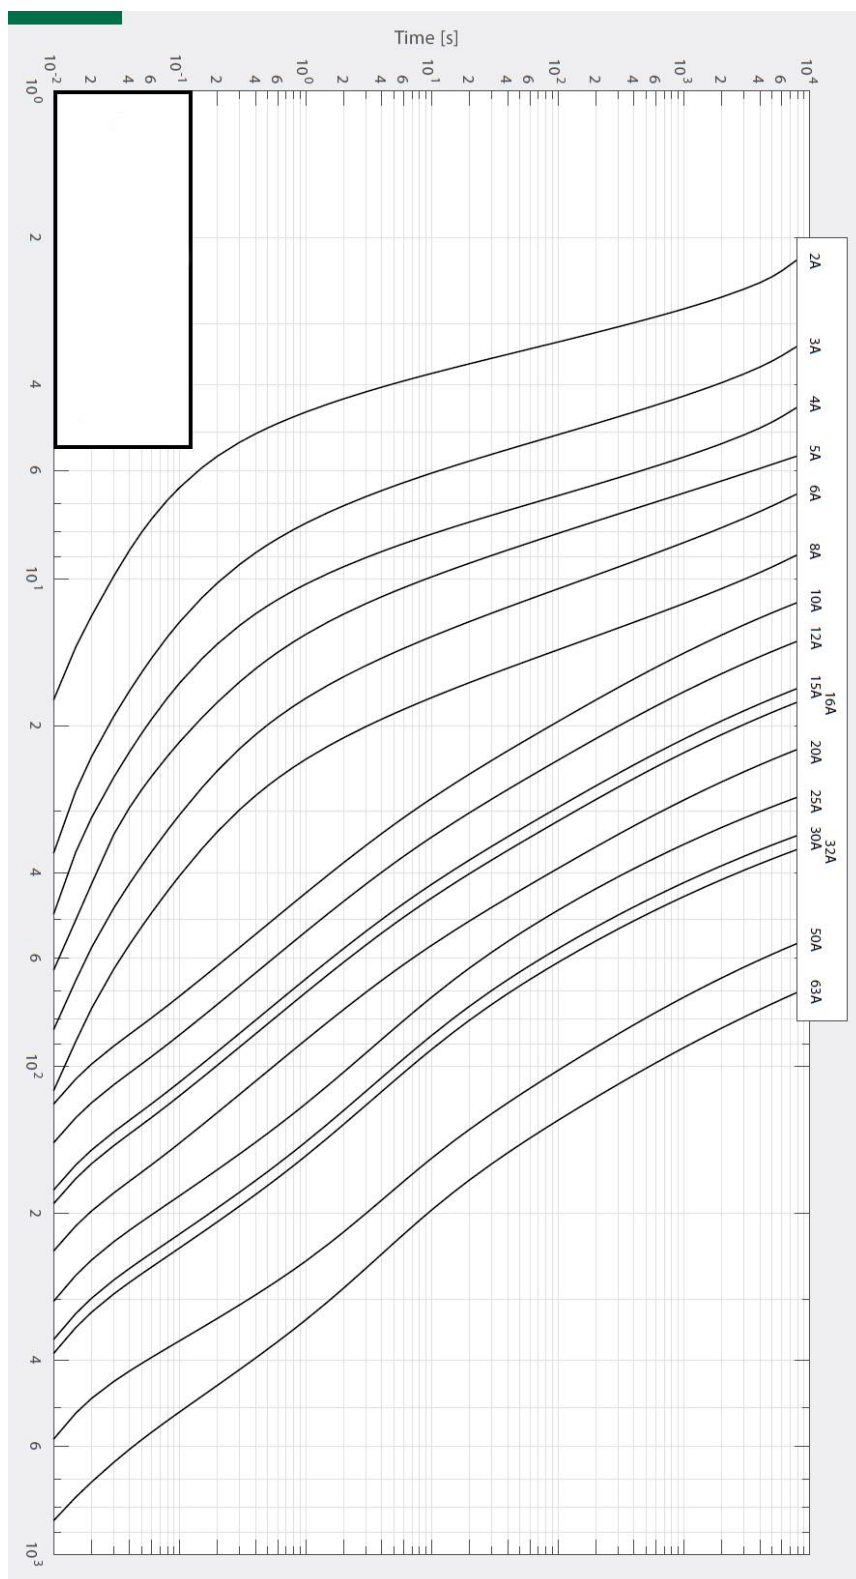



**Declassamento corrente nominale
In funzione della temperatura ambiente:**

***Rated current derating in function
of ambient temperature:***

