



FUSIBILI A COLTELLO NH aM CON PERCUSSORE

Caratteristiche generali:

- Tipo prodotto: fusibili a coltello serie NH;
- Tensione nominale: 500/690V AC;
- Famiglie: standard (NH/CP) e speciale (NH/CP-S);
- Dimensioni: NH-00C, NH-00, NH-1, NH-2, NH-3;
- Caratteristica d'intervento: aM;
- Conformi alle norme: CEI 32-1, CEI 32-4, IEC 60269-1, IEC 60269-2, DIN 43620;
- Corpo in steatite;
- Contatti in rame argentato;
- Corrente nominale: da 6A a 630A;
- Potere di interruzione: 100kA;
- Esecuzione con percussore;
- Confezione minima: 3 pezzi;

BLADE TYPE NH aM FUSES WITH STRIKER

General characteristics:

- *Product type: blade type NH fuses;*
- *Rated voltage: 500/ 690V AC;*
- *Groups: standard (NH/CP) and special (NH/CP-S);*
- *Dimen.: NH-00C, NH-00, NH-1, NH-2, NH-3;*
- *Time-current characteristic: aM;*
- *Conform to: CEI 32-1, CEI 32-4, IEC 60269-1, IEC 60269-2, DIN 43620;*
- *Steatite body;*
- *Silver plated copper contacts;*
- *Rated current: from 6A to 630A;*
- *Breaking capacity: 100kA;*
- *Fuses with striker mechanism;*
- *Minimum packaging: 3 pieces;*

Foto dei prodotti / Products images



Pagine totali del documento: 4

Document total pages: 4

Ultimo aggiornamento: 3 dicembre 2020

Last updated: 3rd December 2020



Codici e caratteristiche principali: Codes and basic characteristics:

grandezza size	NH/CP (1) con percussore <i>NH/CP (1) with striker</i>	NH/CP-S (2) con percussore <i>NH/CP-S (2) with striker</i>	In (A)	Vn (V)	conf. pack.
NH-00C	—	1590006S ⁽³⁾	6	690	3
	—	1590010S ⁽³⁾	10	690	3
	—	1590016S ⁽³⁾	16	690	3
	—	1590020S ⁽³⁾	20	690	3
	—	1590025S ⁽³⁾	25	690	3
	—	1590035S ⁽³⁾	35	690	3
	—	1590040S ⁽³⁾	40	690	3
	—	1590050S ⁽³⁾	50	690	3
NH-00	—	1590063S ⁽³⁾	63	690	3
	—	1590080S ⁽³⁾	80	500	3
NH-1	—	1590100S ⁽³⁾	100	500	3
	—	1591063S ⁽³⁾	63	690	3
	1591080	1591080S ⁽³⁾	80	690	3
	1591100	1591100S ⁽³⁾	100	690	3
	1591125	1591125S ⁽³⁾	125	690	3
	1591160	1591160S ⁽³⁾	160	690	3
	1591200	1591200S ⁽³⁾	200	690	3
	1591250	1591250S	250	500	3
NH-2	—	—	100	690	3
	1592125	—	125	690	3
	1592160	1592160S ⁽³⁾	160	690	3
	1592200	1592200S ⁽³⁾	200	690	3
	1592225	1592250S ⁽³⁾	250	690	3
	1592315	1592315S ⁽³⁾	315	690	3
	1592355	1592355S ⁽³⁾	355	690	3
	1579400	1592400S	400	500	3
NH-3	—	—	315	690	3
	—	—	355	690	3
	1593400	1593400S ⁽³⁾	400	690	3
	1593500	1593500S ⁽³⁾	500	690	3
	1593630	1593630S	630	500	3

(1) Da utilizzare con basi speciali complete di microinterruttore (basi tipo NHU/MS)

(2) Da utilizzare con sezionatori LTS/S

(3) Esecuzione a 500V



(1) To be used with special bases complete with microswitch (fuse bases type NHU/MS)

(2) To be used with disconnectors LTS/S

(3) 500V version




Disegno (dimensioni in mm):




Drawing (dimensions in mm):

tipo type	K	L	M	S1
NH-00C	—	20,7	16,7	7,5
NH-00	—	20,7	16,7	7,5
NH-1	13,7	19,7	25	12
NH-2	16,2	27,4	25	12
NH-3	17	35,6	25	12
NH-4a	24	49	25	12



Curve caratteristiche tempo / corrente

Time / current characteristic curves

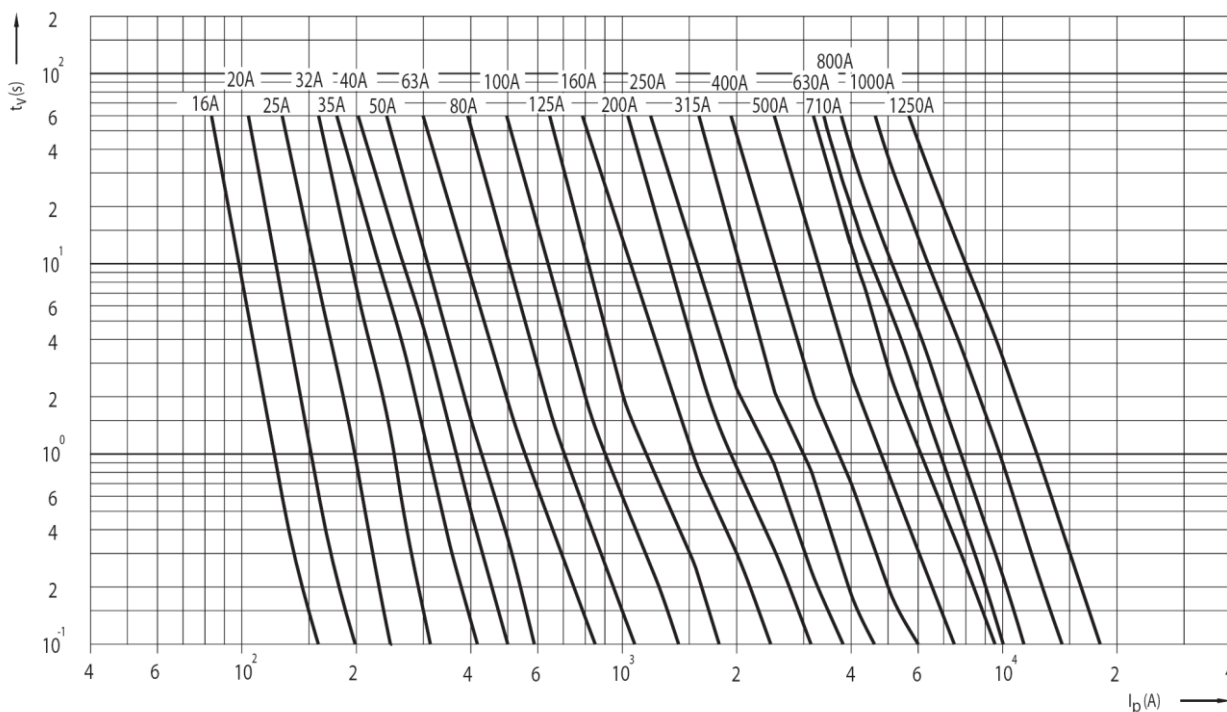

ITALWEBER S.p.A

Sede unica: Via E. Fermi 40/42 - 20057 Assago (MI) - Italy
Telefono +39 02 93977.1 - Telefax +39 02 93904565
E-MAIL: info@italweber.it - info@pec.italweber.it

Capitale Sociale i.v. Euro 655.200,00
C.C.I.A.A. Milano N. 565572
Trib. Milano Reg.Soc.108694, Vol. 2869
C.F.-P.IVA 00737760157

