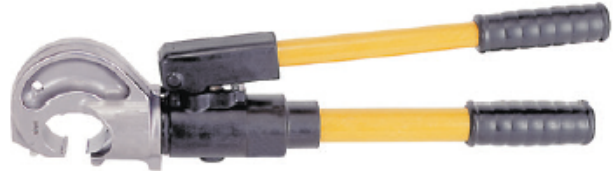


PINZE OLEODINAMICHE MANUALI
MANUAL HYDRAULIC CLAMPS

codice IW IW code	descrizione	description	conf. pack.
HVD51 	CARATTERISTICHE: • Forza Sviluppata: 50 KN • Ruotabile di 180° • Adatto per sez. da 10 a 150 mm² Cu-Al • Braccia isolate in PVC • Lunghezza: 370 mm • Peso: 1,9 Kg PRINCIPALI CAMPI DI UTILIZZO: • Capicorda e connettori BT: sez. max 150 mm² • Connettori a C: sez. max 35 mm² • Capicorda e connettori in alluminio: sez. max 120 mm² • Connettori brasati: sez. max 120 mm² Per la scelta delle matrici vedere pagina 418	CHARACTERISTICS: • Developed Force: 50 KN • Rotatable 180° • Suitable for section. from 10 to 150 mm² Cu-Al • PVC insulated arms • Length: 370 mm • Weight: 1.9 kg MAIN FIELDS OF USE: • LV cable lugs and connectors: sec. max 150 mm² • C-connectors: sec. max 35 mm² • Aluminum cable lugs and connectors: sec. max 120 mm² • Brazed connectors: sec. max 120 mm² To choose the die sets, see page 418	1
HDC60 	CARATTERISTICHE: • Forza Sviluppata: 60kN • Ruotabile di 180° • Adatto per sez. da 6 a 300 mm² Cu-Al • Braccia isolate in PVC • L = 460 mm • Peso = 2,7 Kg PRINCIPALI CAMPI DI UTILIZZO: • Capicorda e connettori BT: sez. max 300 mm² • Connettori a C: sez. max 35 mm² • Capicorda e connettori in alluminio: sez. max 300 mm² • Connettori brasati: sez. max 120 mm² Per la scelta delle matrici vedere pagina 419	CHARACTERISTICS: • Developed Force: 60kN • Rotatable 180° • Suitable for section from 6 to 300 mm² Cu-Al • PVC insulated arms • L = 460 mm • Weight = 2.7 Kg MAIN FIELDS OF USE: • LV cable lugs and connectors: sec. max 300 mm² • C-connectors: sec. max 35 mm² • Aluminum cable lugs and connectors: sec. max 300 mm² • Brazed connectors: sec. max 120 mm² To choose the die sets, see page 419	1
HC120 	CARATTERISTICHE: • Forza Sviluppata: 120kN • Coperchio aperto a “C”, ruotabile di 360° • Adatto per sez. da 10 a 300 mm² Cu-Al • Braccia isolate in PVC • Matrici mezzo-circolari • L = 575 mm • Peso = 6 Kg • Consegnato in cassetta metallica • Apertura: 24,1 mm Per la scelta delle matrici vedere pagina 422	CHARACTERISTICS: • Developed Force: 120kN • Open “C” lid, rotatable 360° • Suitable for section. from 10 to 300 mm² Cu-Al • PVC insulated arms • Half-circular matrices • L = 575 mm • Weight = 6.0 Kg • Delivered in metal case • Opening: 24.1 mm To choose the die sets, see page 422	1
HU137 	CARATTERISTICHE: • Forza Sviluppata: 120kN • Adatto per sez. da 10 a 300 mm² Cu-Al • Braccia isolate in PVC • Matrici mezzo-circolari e punzonatura profonda • Per capicorda e connettori in alluminio • L = 690 mm • Peso = 6 Kg Per la scelta delle matrici vedere pagina 420	CHARACTERISTICS: • Developed Force: 120kN • Suitable for section. from 10 to 300 mm² Cu-Al • PVC insulated arms • Half-circular dies and deep punching • For aluminum cable lugs and connectors • L = 690 mm • Weight = 6.0 Kg To choose the die sets, see page 420	1