

PORTAFUSIBILI PER FUSIBILI 10/14x85

Caratteristiche generali:

- Portafusibili per fusibili cilindrici 10/14x85 mm;
- Tipologia: unipolare;
- Tensione nominale: 1500V DC;
- Corrente nominale: 63A;
- Fissaggio su guida DIN;
- Massima potenza dissipata del fusibile inserito: 8,5W (tipo 10/14x85) e 14,5W (10/14x85 T);
- Terminali: 0,75-16 mm² (10/14x85) e 0,75-50 mm² (10/14x85 T);
- Categoria di utilizzo: DC-20 (non aprire sotto carico);

FUSEHOLDERS FOR 10/14x85 FUSES

General characteristics:

- Fuseholders for 10/14x85 mm cylindrical fuses;
- Type: single pole;
- Rated voltages: 1500V DC;
- Rated current: 63A;
- Fixing on DIN rail;
- Maximum power dissipation of the inserted fuse: 8,5W (tipo 10/14x85) e 14,5W (10/14x85 T);
- Terminals: 0,75-16 mm² (10/14x85) e 0,75-50 mm² (10/14x85 T);
- Utilization category: DC-20 (do not open under load);

Immagine del prodotto / Product image




Pagine totali del documento: 2

Document total pages: 2

Ultimo aggiornamento: 2 ottobre 2024


Last update: 2nd October 2024



Codici e caratteristiche / Codes and characteristics

codice IW IW code	tipo type	per fusibile for fuse type	indicatore luminoso indicator light	In (A)	Vn (V)	conf. pack.
2341085D	DCH 10X85	CH10/SP - CH10/14/SP	-	40A	1500V DC	1
2344185D	DCH 10X85/I	CH10/SP - CH10/14/SP	LED	40A	1500V DC	1
2347185D	DCH 10/14X85 T	CH10/14/T	-	63A	1500V DC	1
2348185D	DCH 10/14X85/I T	CH10/14/T	LED	63A	1500V DC	1

Disegno (dimensioni in mm) / Drawing (dimensions in mm)

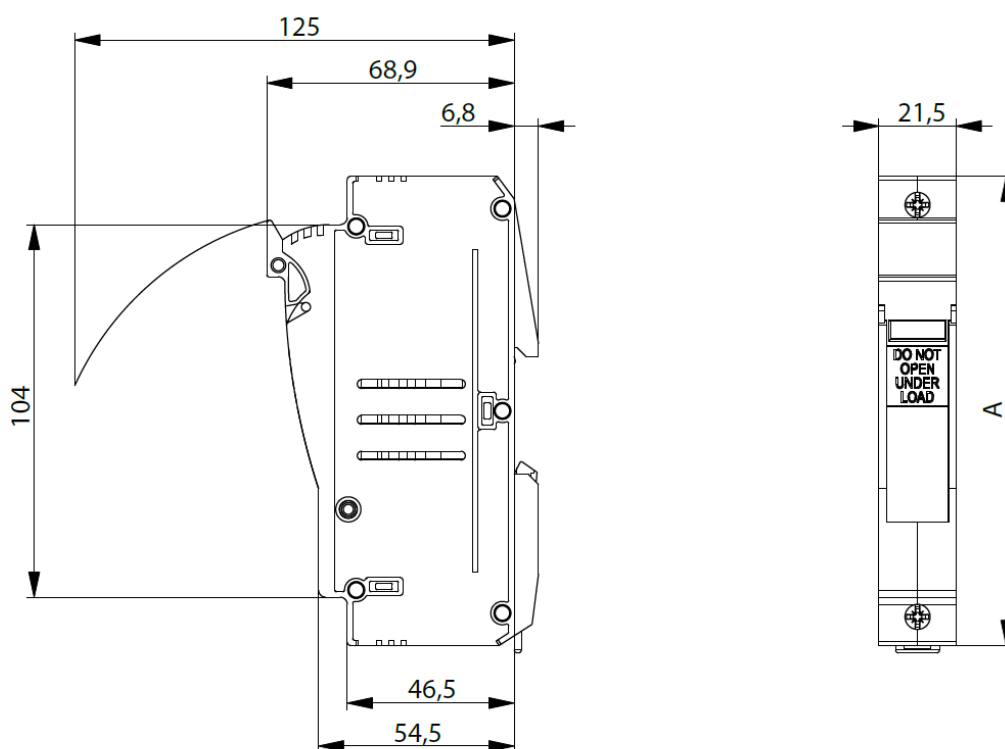

	A
10/14x85	131
10/14x85 T	135,6