



**BASI PORTAFUSIBILI UL/CSA 600V  
CLASSE J**

**Caratteristiche generali:**

- Tipo prodotto: basi portafusibili omologate UL/CSA;
- Conformi alle norme: UL 248-8, CSA C22.2;
- Corpo in materiale plastico con grado di autoestinguenza: UL94-V0;
- Corrente nominale: fino a 600A;
- Tensione nominale: 600V AC;
- Confezione minima: 1 pezzo;

**UL/CSA 600V FUSE BASES  
CLASS J**

**General characteristics:**

- *Product type: UL/CSA approved fuse bases;*
- *Conform to standards: UL 248-8, CSA C22.2;*
- *Body made in thermoplastic UL94-V0 self extinguishing material;*
- *Rated current: up to 600A;*
- *Rated voltage: 600V AC;*
- *Minimum packaging: 1 piece;*

**Foto del prodotto (indicativa / Product image (example))**



Pagine totali del documento: 5

*Document total pages: 5*

Ultimo aggiornamento: 29 aprile 2021

*Last update: 29th April 2021*



**Codici per l'ordinazione:**

**Ordering codes:**

| codice<br>code | Tipo<br>type | poli<br>poles | tipo fusibile<br>fuse type | In (A) | conf.<br>pack. |
|----------------|--------------|---------------|----------------------------|--------|----------------|
| 2680001        | JM60030-1SR  | 1             | Class J – 1A / 30A         | 30A    | 1              |
| 2680031        | JM60030-3SR  | 3             | Class J – 1A / 30A         | 30A    | 1              |
| 2680002        | JM60060-1CR  | 1             | Class J – 30A / 60A        | 60A    | 1              |
| 2680032        | JM60060-3CR  | 3             | Class J – 30A / 60A        | 60A    | 1              |
| 2680039        | JM60100-1CR  | 1             | Class J – 70A / 100A       | 100A   | 1              |
| 2680040        | JM60100-3CR  | 3             | Class J – 70A / 100A       | 100A   | 1              |
| 2680004        | JM60200-1CR  | 1             | Class J – 110A / 200A      | 200A   | 1              |
| 2680034        | JM60200-3CR  | 3             | Class J – 110A / 200A      | 200A   | 1              |
| 2680005        | JM60400-1CR  | 1             | Class J – 225A / 400A      | 400A   | 1              |
| 2680035        | JM60400-3CR  | 3             | Class J – 225A / 400A      | 400A   | 1              |
| 2680006        | JM60600-1CR  | 1             | Class J – 450A / 600A      | 600A   | 1              |
| 2680036        | JM60600-3CR  | 3             | Class J – 450A / 600A      | 600A   | 1              |

**Altre caratteristiche**

- Produttore: Bussmann;
- Approvazione UL: IZLT.E14853;
- Approvazione CSA: 47235 / 6225.01;


**Other characteristics**

Manufacturer: Bussmann;  
UL approval: IZLT.E14853;  
CSA approval: 47235 / 6225.01;

**DRAWINGS (dimensions in mm)**

[illegible]


Technical drawings of the 3000 Series 1200mm wide door. The drawings include a side view, a top view, and a front view. The side view shows a door with a handle and a lock. The top view shows the door's width and height, with dimensions in inches and millimeters. The front view shows the door's face with a handle and a lock. Dimensions are provided for the door's width, height, and handle location.




**DISEGNI (dimensioni in mm)**

**DRAWINGS (dimensions in mm)**

**Portafusibili tipo M per fus. 110-200A - Fuseholders M type for fuses 110-200A**

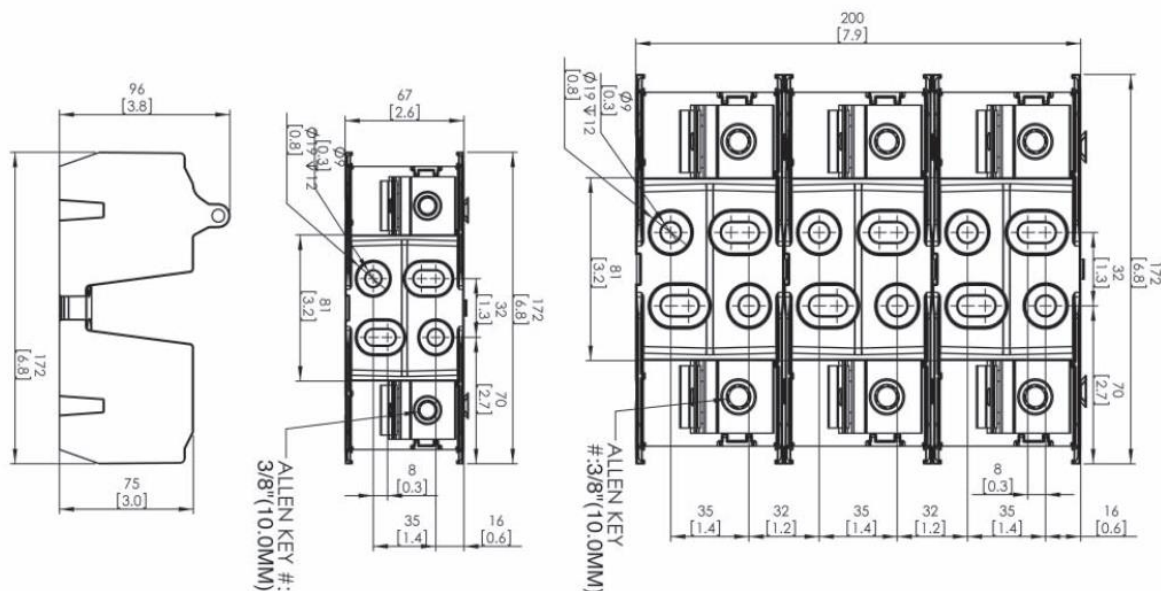

**Portafusibili tipo M per fus. 225-400A - Fuseholders M type for fuses 225-400A**

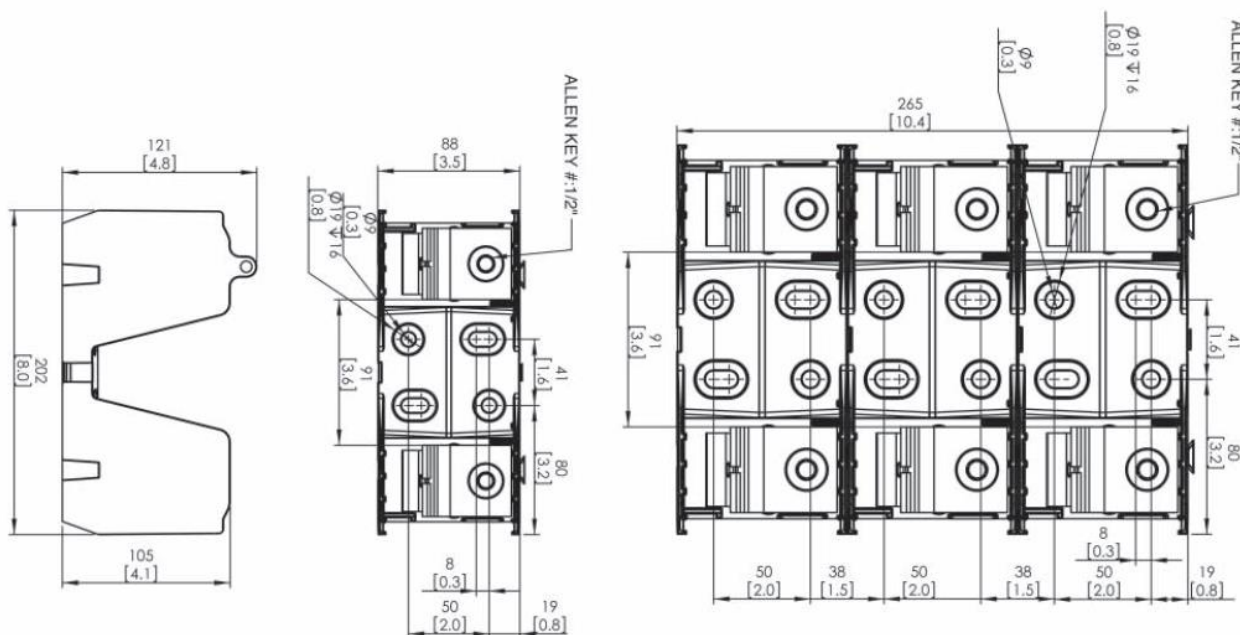



**DISEGNI (dimensioni in mm)**

**DRAWINGS (dimensions in mm)**

**Portafusibili tipo M per fus. 450-600A - Fuseholders M type for fuses 450-600A**

