

PORTASBARRE UNIVERSALE MODULARE A BLOCCHI

Caratteristiche generali:

- Componenti realizzati in polycarbonato rinforzato con fibra di vetro per alte temperature (120°C);
- Colore rosso RAL3002;
- Materiale esente da alogeni ed autoestinguente;
- Il blocchetto universale componibile BL UN consente di supportare, ruotandolo opportunamente ed utilizzando la faccia desiderata, sbarre di spessore 5 mm, 6 mm, 8 mm e 10 mm;
- Le spalle di fissaggio S-BL UN consentono di supportare sbarre di altezza 30, 50, 60, 80 100 e 120 mm;
- Parti metalliche non fornite;

MODULAR BLOCK TYPE UNIVERSAL BUSBARS SUPPORT

General characteristics:

- *Components made in polycarbonate additioned with fiber glass for high temperatures (120°C);*
- *Colour: red RAL 3002;*
- *Material halogen free and self-extinguishing;*
- *The modular universal block BL UN can be used, rotating it as desired and using the correct part, busbars with a thickness of 5 mm, 6 mm, 8 mm or 10 mm;*
- *The lateral supports S-BL UN can be used with bars of different heights: 30, 50, 60, 80, 100 and 120 mm;*
- *Metal components not included;*

Foto del prodotto / Product image




Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 3 Novembre 2015

Last update: 3rd November 2015

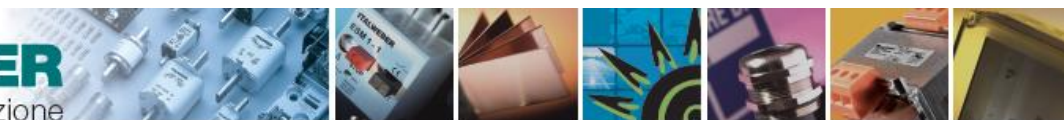

Codici:

Codes:



codice code	Tipo Type	Descrizione Description	conf. pack
1014450	BL UN	Blocchetto universale / <i>Universal block</i>	2
1014460	S-BL UN	Supporto laterale / <i>Lateral support</i>	2

Disegni (dimensioni in mm):

Drawing (dimensions in mm):

Blocchetto universale / *Universal block*

Supporto laterale / *Lateral support*

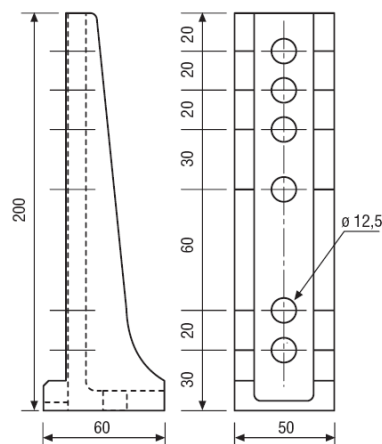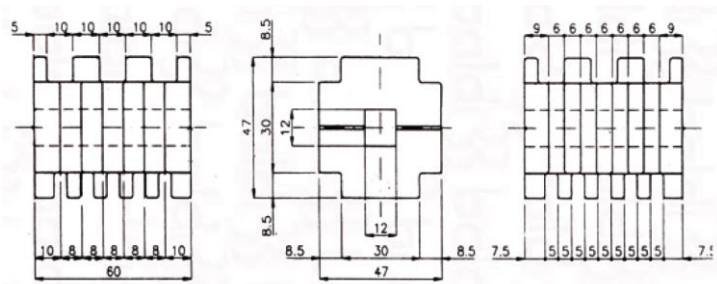


Numero cave:


- 5 cave per barre con spessore 5 mm;
- 4 cave per barre con spessore 6 mm;
- 3 cave per barre con spessore 8 mm;
- 3 cave per barre con spessore 10 mm;

Number of pits:

- 5 pits for bars with a thickness of 5 mm;
- 4 pits for bars with a thickness of 6 mm;
- 3 pits for bars with a thickness of 8 mm;
- 3 pits for bars with a thickness of 10 mm;



Esempio sistema 4P - *Example 4P system*

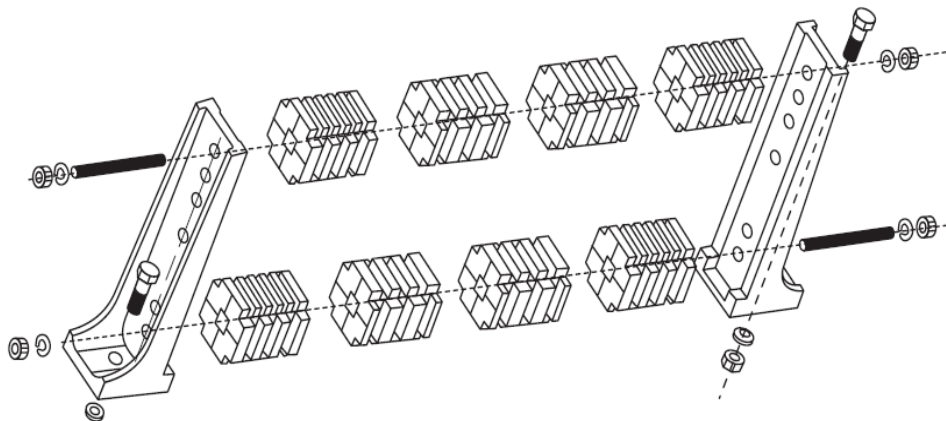

Componenti portasbarre completo:

- 2 supporti laterali;
- 6 (trifase) / 8 (trifase più neutro) blocchetti universali;
- Tiranti e bulloneria (non fornite);

Components finished busbar support:

- *2 lateral supports;*
- *6 (three phases) / 8 (three phases + neutral) universal blocks;*
- *Metal parts (not included);*