



FUSIBILI EXTRARAPIDI TIPO TS

Caratteristiche generali:

- Tipo prodotto: fusibili a corpo quadro serie A-100ET;
- Tipologia: fusibili con fori filettati (TS);
- Tensione nominale: 1000V AC;
- Dimensioni: A1, A2 e A3;
- Caratteristica d'intervento: aR;
- Conformi alle norme: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4, DIN 43653;
- Corpo in steatite;
- Contatti in rame argentato;
- Corrente nominale: da 63A a 1250A;
- Potere di interruzione: 200kA;
- Confezione minima: 1 pezzo;

TS TYPE HIGH SPEED FUSES

General characteristics:

- *Product type: square body A-100ET fuses;*
- *Types: fuses with threaded holes (TS);*
- *Rated voltage: 1000V AC;*
- *Dimensions: A1, A2 and A3;*
- *Time-current characteristic: aR;*
- *Conform to: CEI 32-1, CEI 32-7, IEC 60269-1, IEC 60269-4, DIN 43653;*
- *Steatite body;*
- *Silver plated copper contacts;*
- *Rated current: from 63A to 1250A;*
- *Breaking capacity: 200kA;*
- *Minimum packaging: 1 piece;*

Foto dei prodotti / Products images



Pagine totali del documento: 7

Document total pages: 7

Ultimo aggiornamento: 29 Gennaio 2015

Last updated: 29th January 2015



Codici e caratteristiche principali:

Codes and basic characteristics:

grandezza	tipo TS – con indicatore visivo	tipo TS – con percussore centrale (1)	In (A)	Vn (V)	caratteristica	conf.
size	type TS – with visual indicator	type TS – with centre trip indicator (1)			characteristic	pack.
A1-69ET	1760063M	1760063MT	63	1000	aR	3
	1760080M	1760080MT	80	1000	aR	3
	1760100M	1760100MT	100	1000	aR	3
	1760125M	1760125MT	125	1000	aR	3
	1760160M	1760160MT	160	1000	aR	3
	1760200M	1760200MT	200	1000	aR	3
	1760250M	1760250MT	250	1000	aR	3
	1760315M	1760315MT	315	1000	aR	3
	1760350M	1760350MT	350	1000	aR	3
	1760400M	1760400MT	400	1000	aR	3
A2-69ET	1761350M	1761350MT	350	1000	aR	3
	1761400M	1761400MT	400	1000	aR	3
	1761500M	1761500MT	500	1000	aR	3
	1761550M	1761550MT	550	1000	aR	3
	1761630M	1761630MT	630	1000	aR	3
A3-69ET	1762710M	1762710MT	710	1000	aR	3
	1762800M	1762800MT	800	1000	aR	3
	1762910M	1762910MT	1000	1000	aR	3
	1762990M	1762990MT	1250	1000	aR	3


(1) Microinterruttore opzionale codice
1750011 (più adattatore 1750006)

(1) Optional microswitch code 1750011
(plus adapter 1750006)



Disegno (dimensioni in mm):

Drawing (dimensions in mm):

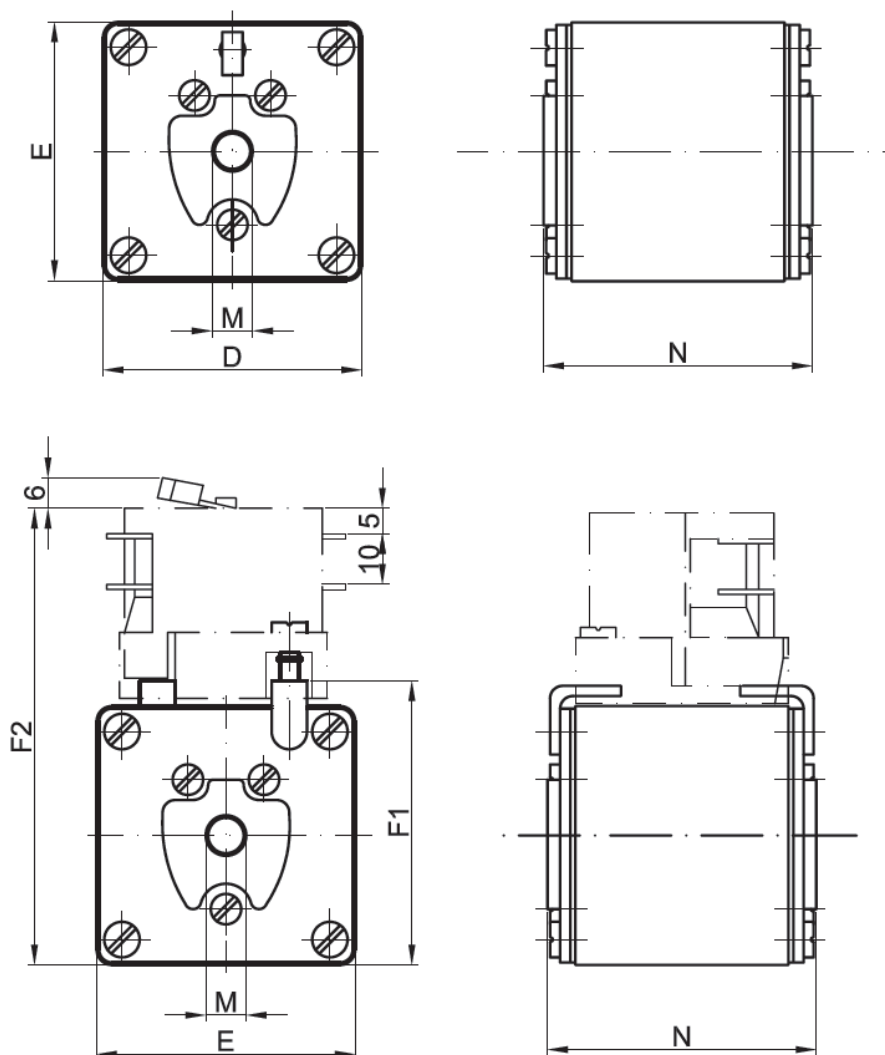

grand. - size	D	E	F1	F2	M	N
1	51	51	56	90	M8	75
2	60	60	65	99	M10	75
3	75	75	80	114	M12	75



Altre caratteristiche


Other characteristics


grandezza - size	I_n (A)	P_w (W)	I^2t total (A ² s)	I_k (kA)
A1-100ET	63	15	2.000	200
	80	20	3.400	200
	100	25	6.100	200
	125	30	11.000	200
	160	35	17.000	200
	200	45	31.000	200
	250	54	50.000	200
	315	60	110.000	200
	350	65	150.000	200
	400	70	200.000	200
	500	80	400.000	200
A2-100ET	350	70	130.000	200
	400	80	170.000	200
	500	90	320.000	200
	550	97	450.000	200
	630	108	600.000	200
A3-100ET	710	125	670.000	200
	800	136	870.000	200
	1000	157	2.000.000	200
	1250	170	3.000.000	200



**Curve caratteristiche tempo / corrente
Tipo A1-100ET**


**Time / current characteristic curves
A1-100ET type**

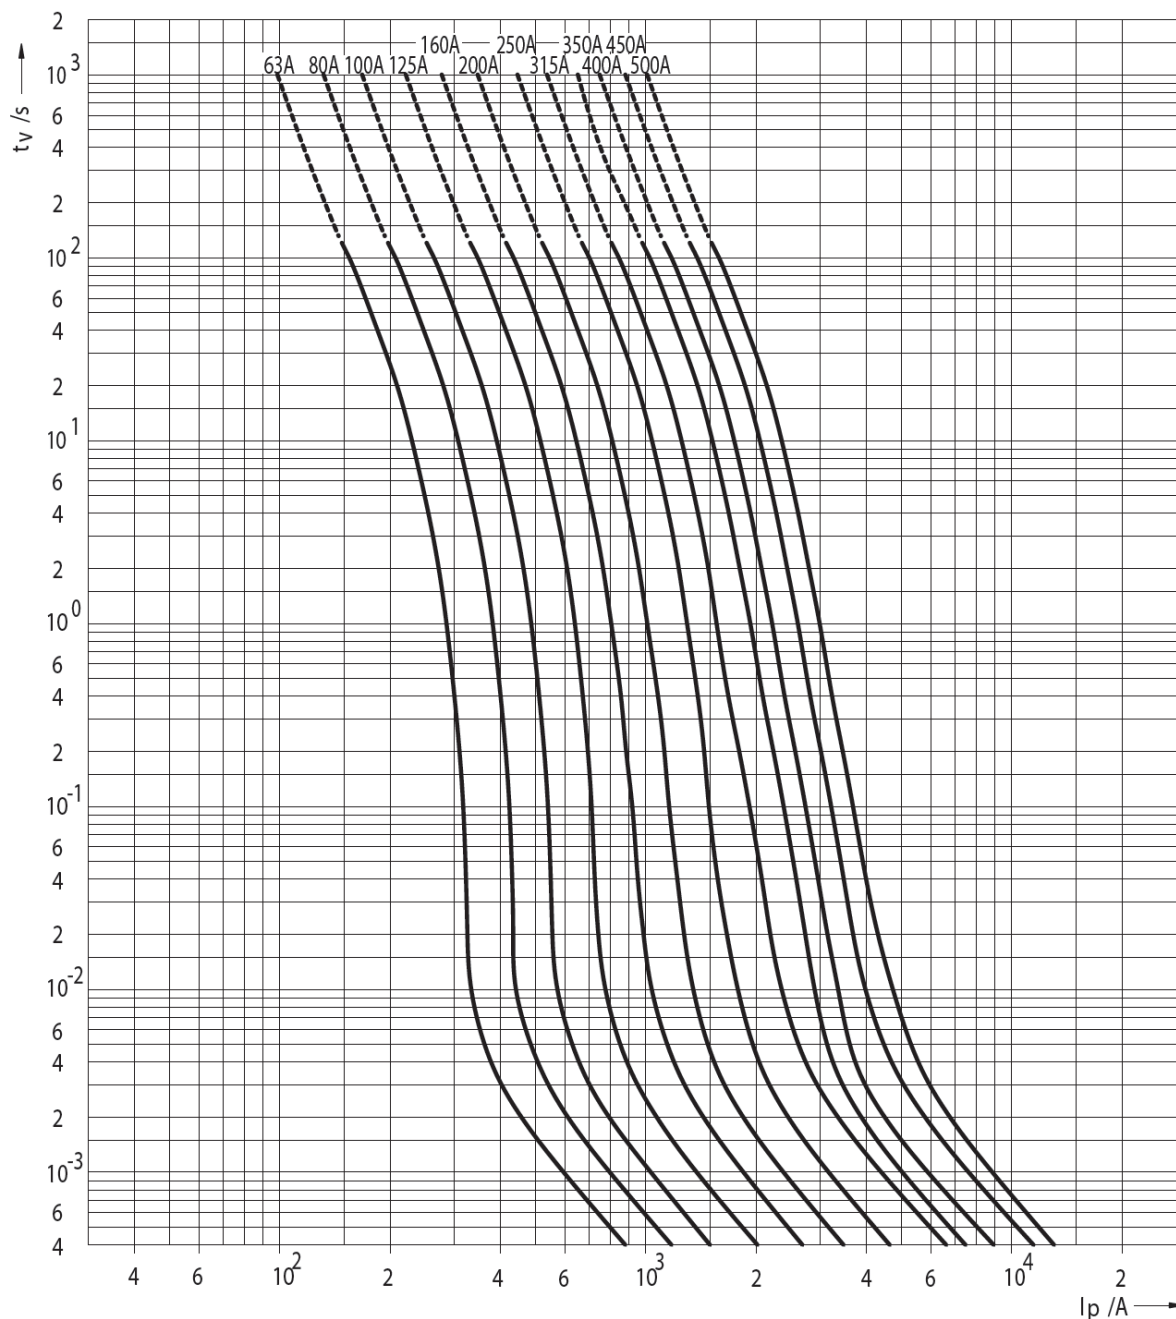


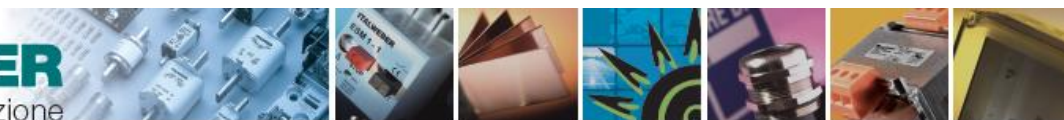

**Curve caratteristiche tempo / corrente
Tipo A2-100ET**


**Time / current characteristic curves
A2-100ET type**

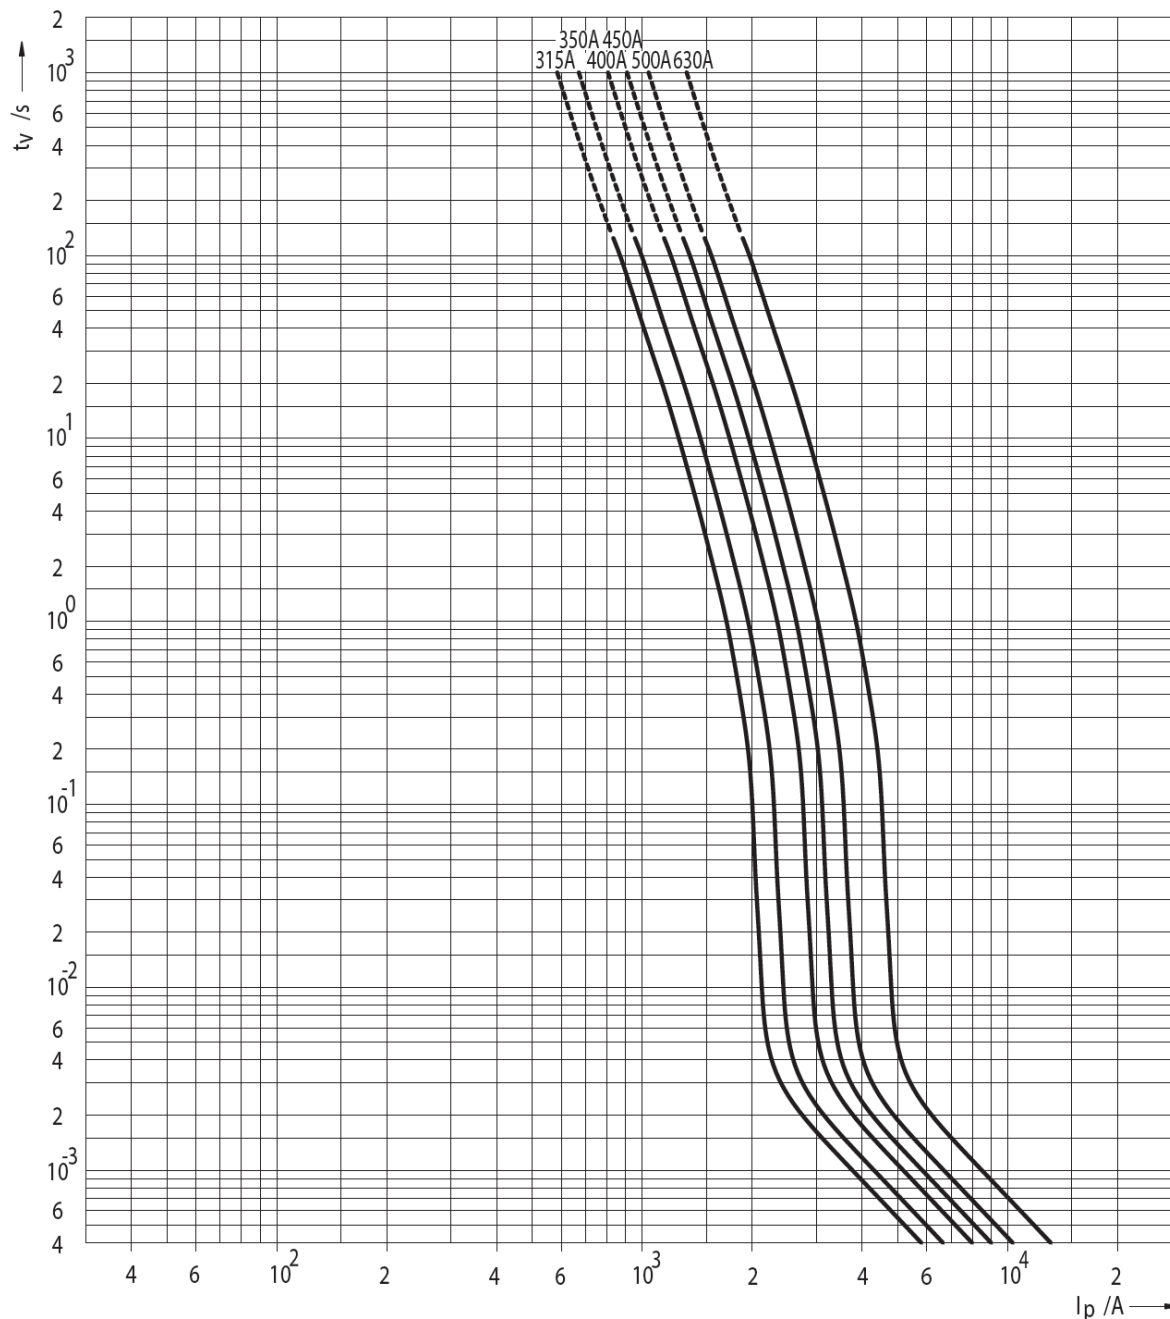

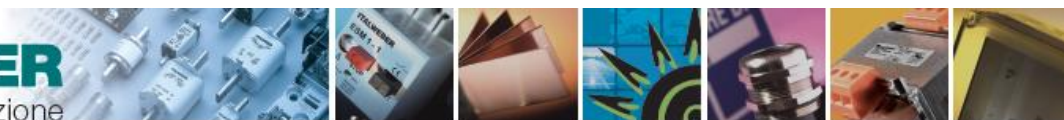

**Curve caratteristiche tempo / corrente
Tipo A3-100ET**

**Time / current characteristic curves
A3-100ET type**

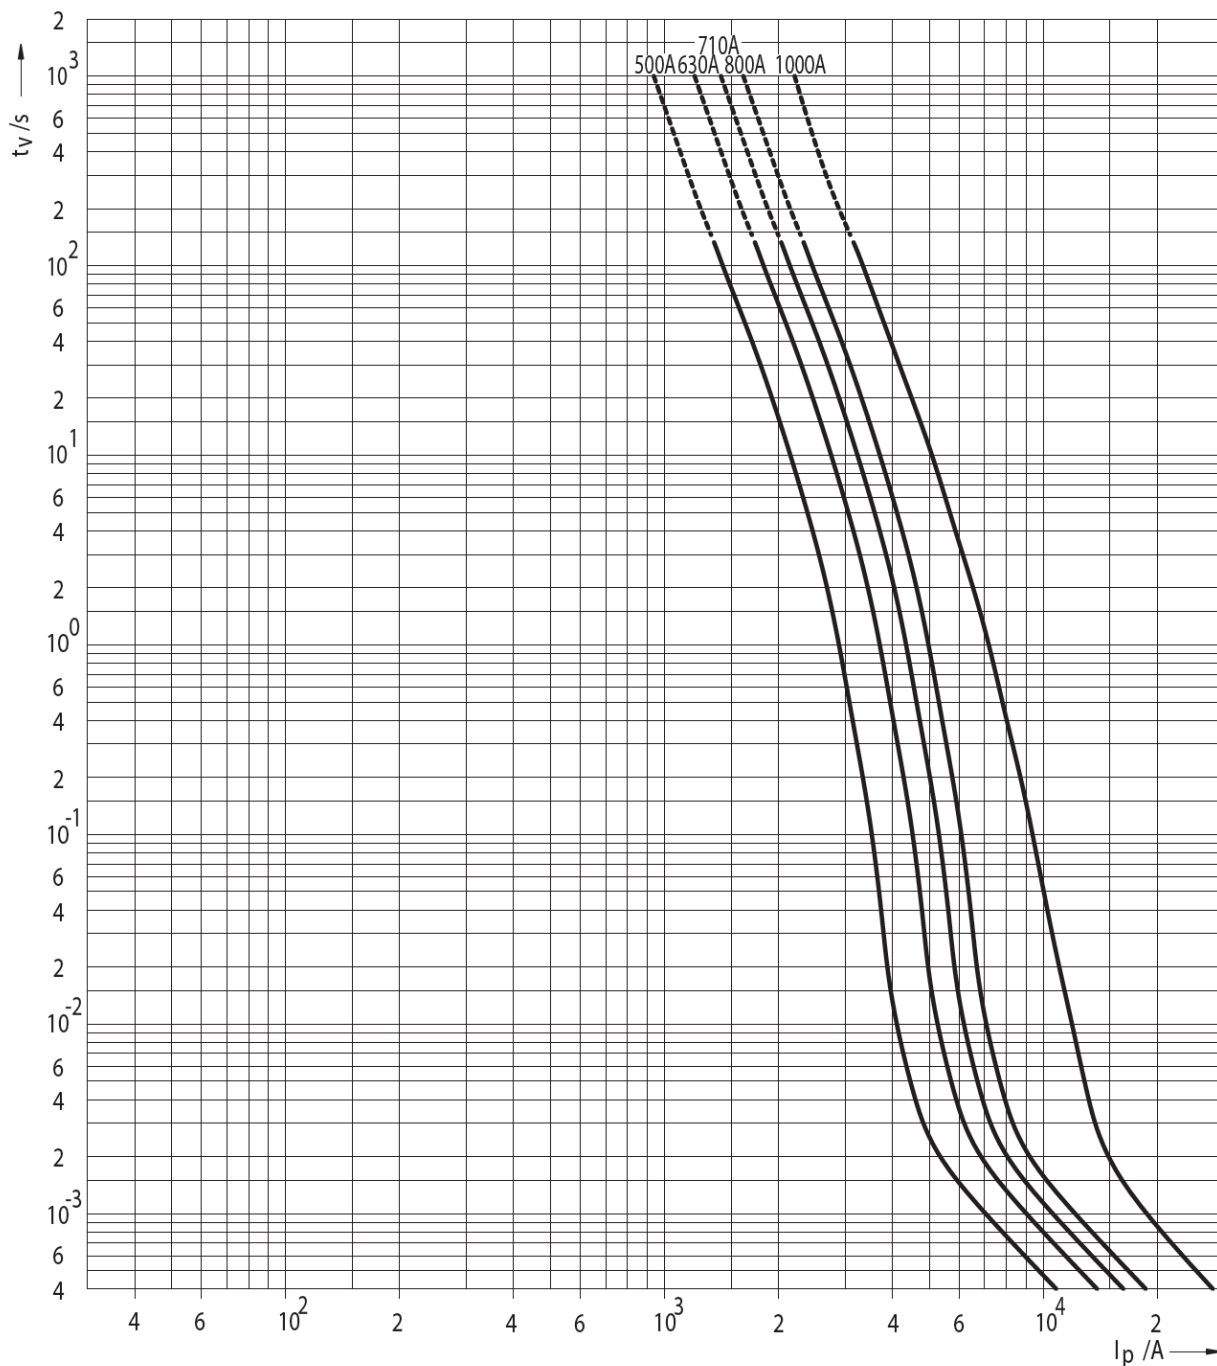

ITALWEBER S.p.A

Sede unica: Via E. Fermi 40/42 - 20057 Assago (MI) - Italy
Telefono +39 02 93977.1 - Telefax +39 02 93904565
E-MAIL: info@italweber.it - info@pec.italweber.it

Capitale Sociale i.v. Euro 655.200,00
C.C.I.A.A. Milano N. 565572
Trib. Milano Reg.Soc.108694, Vol. 2869
C.F.-P.IVA 00737760157

