


SUPPORTO A SCALA PER BARRE

Caratteristiche generali:

- Supporto a scala per ancoraggio barre di rame;
- Fissaggio su guida DIN o su piastra di fondo;
- Tipo: tre poli o tre poli + neutro;
- Materiale: PA + fibra di vetro (materiale senza alogeni e V0);
- Utilizzabile con barre di rame aventi dimensioni: 20x5, 25x5, 30x5 e 32x5 mm;
- Disegno speciale per ospitare barre poste a 45° o in posizione verticale;
- Fissaggio delle barre al supporto per mezzo di bulloni M6 (diametro fori: 6,5 mm);
- Temperatura max di utilizzo: 220°C;
- Rigidità dielettrica: 20kV tra le fasi e 19kV tra fase e terra;

Foto del prodotto / Product image

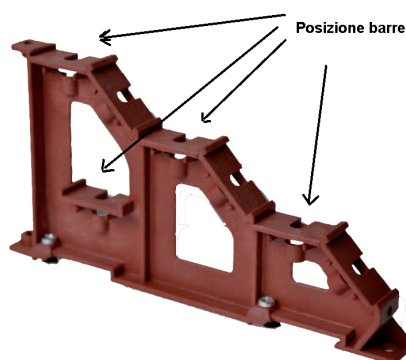


STAIR-SHAPED BUSBARS SUPPORT

General characteristics:

- Stairs-shaped busbar support for copper bars fastening;
- Fixing on DIN rail or on mounting plate;
- Type: 3 poles and 3P+N;
- Material: PA + fibre glass (V0 and halogen free material);
- Usable with flat copper bars with following dimensions: 20x5, 25x5, 30x5 e 32x5 mm;
- Special design for hosting copper bars fitted at 45° or in vertical position;
- Bars fasten to the support by means of M6 bolts and nuts (holes diameter: 6,5 mm);
- Max temperature: 220°C;
- Dielectric strenght 20kV between phases and 19kV phase / earth;

Disegno (mm) / Drawing (mm):

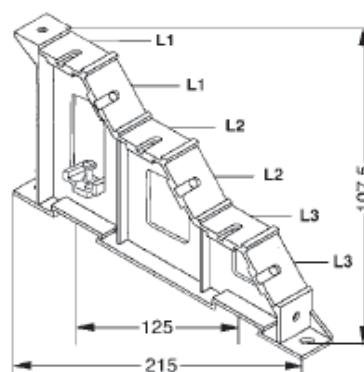


Pagine totali del documento: 2

Document total pages: 2

Ultimo aggiornamento: 12 gennaio 2022

Last update: 12th January 2022

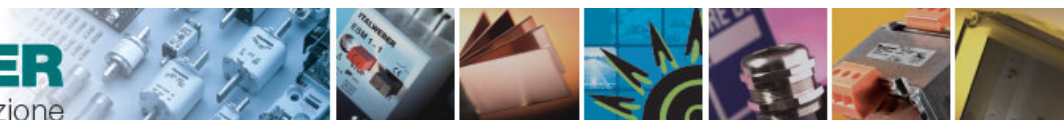

Codici:

Codes:

codice code	Tipo type	Descrizione Description	conf. pack
1014170	SWO4300	Supporto portabarre per barre 20x5, 25x5, 30x5 e 32x5 mm Busbar support for 20x5, 25x5, 30x5 and 32x5 mm copper bars	2

Tabella tenuta al cortocircuito:

Short circuit withstand capability:

<i>Rectangular copper bar dimensions</i>		<i>L = 200 mm</i>	<i>L = 300 mm</i>	<i>L = 400 mm</i>
<i>Maximum rated current</i>				
<i>mm AxG</i>	<i>Amp.</i>	<i>I''_k KA</i>	<i>I''_k KA</i>	<i>I''_k KA</i>
20x5	300	21	21	21
25x5	370	25	21	21
30x5	425	25	25	21
32x5	445	25	25	21