

FUSIBILI 6,3x32 EXTRARAPIDI

Caratteristiche generali:

- Fusibili miniatura;
- Dimensioni: 6,3 x 32 mm;
- Caratteristica d'intervento: extrarapida aR;
- Conformi alle norme: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Corpo in steatite;
- Materiale spegniarco: sabbia di quarzo;
- Contatti in ottone nichelato;
- Corrente nominale: da 100mA a 2A;
- Potere di interruzione: 30kA;
- Confezione minima: 10 pezzi;

Foto del prodotto / Product image


6,3x32 HIGH SPEED FUSES

General characteristics:

- Miniature fuses;
- Dimensions: 6,3 x 32 mm;
- Time-current characteristic: high speed aR;
- Conform to standards: CEI 32-6/1, CEI 32-6/2, IEC 60127-1, IEC 60127-2;
- Steatite body;
- Quenching material: quartz sand;
- Nickel plated brass contacts;
- Rated current: from 100mA to 2A;
- Breaking capacity: 30kA;
- Minimum packaging: 10 pieces;

Disegno / Drawing

(dimensioni in mm) / (dimensions in mm)

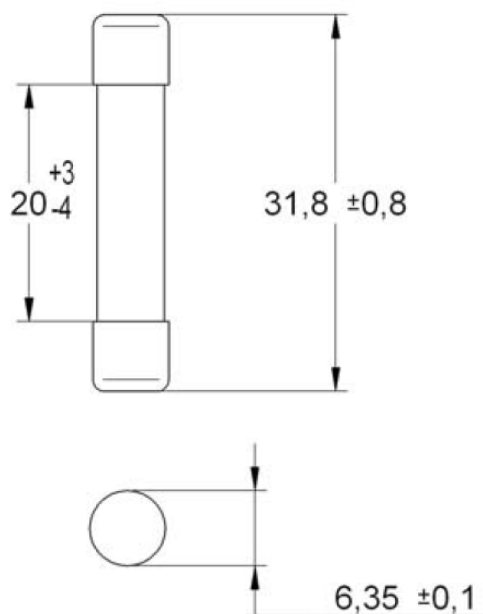


Pagine totali del documento: 3

Document total pages: 3

Ultimo aggiornamento: 1 ottobre 2024

Last updated: 1st October 2024




Codici per l'ordinazione:

Ordering codes:

Fus rapidi HF <i>Fast-acting fuses HF</i>	In	Vn	Caduta di tensione <i>Voltage drop</i>	Potenza dissipata <i>Power dissipation</i>	conf. pack.
0340100DM	100 mA	1000V AC/DC	2500 mV	0,3 W	10
0340125DM	125 mA	1000V AC/DC	2200 mV	0,3 W	10
0340160DM	160 mA	1000V AC/DC	2000 mV	0,4 W	10
0340200DM	200 mA	1000V AC/DC	900 mV	0,2 W	10
0340250DM	250 mA	1000V AC/DC	800 mV	0,2 W	10
0340315DM	315 mA	1000V AC/DC	700 mV	0,3 W	10
0340400DM	400 mA	1000V AC/DC	650 mV	0,3 W	10
0340500DM	500 mA	1000V AC/DC	650 mV	0,4 W	10
0340630DM	630 mA	1000V AC/DC	650 mV	0,5 W	10
0340800DM	800 mA	1000V AC/DC	600 mV	0,5 W	10
0341001DM	1 A	1000V AC/DC	750 mV	0,8 W	10
0341601DM	1,6 A	1000V AC/DC	650 mV	1,1 W	10
0342002DM	2 A	1000V DC	650 mV	1,4 W	10

Con omologazione UR

With UR approval

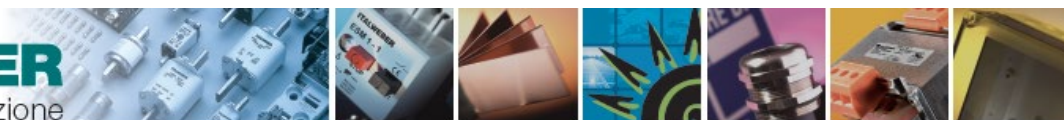

Curve caratteristiche tempo / corrente:

Time / current characteristic curves:

Bemessungsstrom Rated Current	1,0 I _n		2,75 I _n		4 I _n		10 I _n	
	min.	max.	min.	max.	min.	max.	min.	max.
100 mA - 800 mA	1 h	-	-	-	-	60 ms	-	6 ms
1 A - 2 A	1 h	-	-	-	1 ms	25 ms		6ms

