


Linguetta
dal C6AU 500
al C8AU 1300

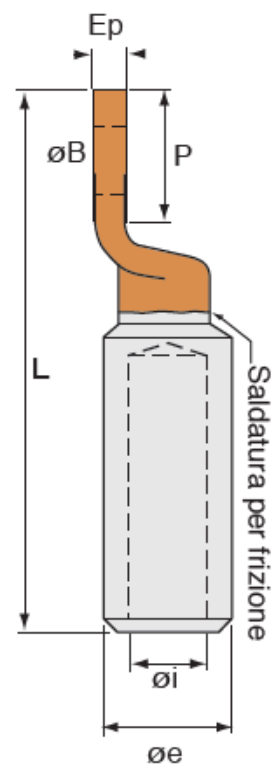

CAPICORDA BIMETALLICI AD OCCHIELLO IN ALLUMINIO E RAME

BIMETALLIC RING TERMINALS IN ALUMINUM AND COPPER

codice IW <i>IW code</i>	sezione (mm ²) <i>section (mm²)</i>	Ø i (mm)	Ø e (mm)	P (mm)	Ø B _e (mm)	J (mm)	L (mm)	Ep. (mm)	conf. <i>pack</i>
C0AU16/M	16	5,5	16	20	10,5	-	79	4,5	3
C0AU25/M	25	6,5	16	20	10,5	-	79	4,5	3
Y3B25A00DAENEL	25	6,5	16	25	12,8	-	86	5	3
C1AU35/M	35	8	20	25	12,8	-	86	5	3
C1AU50/M	50	9	20	25	12,8	-	86	5	3
C1AU70/M	70	11	20	25	12,8	-	86	5	3
C1AU95/M	95	12,5	20	25	12,8	-	86	5	3
C2AU120/M	120	13,7	25	30	12,8	-	110	6	3
C2AU150/M	150	15,5	25	30	12,8	-	110	6	3
C4AU185/M	185	17	32	30	12,8	-	110	6	3
C4AU240/M	240	19,5	32	30	12,8	-	110	6	3
C5AU300/M	300	23,3	40	36	16,5	-	153	7	3
C5AU400/M	400	26	40	36	16,5	-	153	7	3
C6AU500/M	500	29,1	47	60 x 60	4 Ø 9	30	200	10	3
C6AU630/M	630	32,5	47	60 x 60	4 Ø 9	30	200	10	3
C6AU630S/M	630	33,5	47	60 x 60	4 Ø 9	30	200	10	3
C6AU630-36/M	630	36	47	60 x 60	4 Ø 9	30	200	10	3
C7AU800/M	800	37,5	60	80 x 80	4 Ø 11	40	260	10	3
C7AU1000/M	1000	42	60	80 x 80	4 Ø 11	40	260	10	3
C8AU1200/M	1200	45,5	65	80 x 80	4 Ø 11	40	270	10	3
C8AU1300/M	1300	47,5	65	80 x 80	4 Ø 11	40	270	10	3